

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 July 2003 (31.07.2003)


PCT

(10) International Publication Number  
**WO 03/062516 A1**

- (51) International Patent Classification<sup>7</sup>: **D06F 39/00, 33/02**
- (21) International Application Number: **PCT/JP02/13873**
- (22) International Filing Date:  
27 December 2002 (27.12.2002)
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
2002-13384 22 January 2002 (22.01.2002) JP
- (71) Applicant (for all designated States except US):  
**KABUSHIKI KAISHA TOSHIBA [JP/JP]; 1-1, Shibaura 1-chome, Minato-ku, Tokyo 105-8001 (JP).**
- (72) Inventors; and  
(75) Inventors/Applicants (for US only): **KOBAYASHI, Midori [JP/JP]; Room B305A, 257, Nishimatsuyama-cho 2-chome, Seto-shi, Aichi 489-0912 (JP). HARUNA, Hiroyuki [JP/JP]; 1702-13, Takinomizu 2-chome, Midori-ku, Nagoya-shi, Aichi 458-0021 (JP). IMAMURA, Fumihiro [JP/JP]; Room 1-302, 150, Naeba-cho, Seto-shi, Aichi 489-0983 (JP). NISHIMURA, Yoshimi [JP/JP]; Room A405, 2-257, Nishimatsuyama-cho, Seto-shi, Aichi 489-0912 (JP). HAYASHI, Miho [JP/JP]; Room 301, 60, Higashinagane-cho, Seto-shi, Aichi 489-0871 (JP).**
- (74) Agent: **SATO, Tsuyoshi; Nagoya Aoba Seimei Building, 6-15, Sakae 4-chome, Naka-ku, Nagoya-shi, Aichi 460-0008 (JP).**
- (81) Designated States (national): **CN, KR, US.**
- (84) Designated States (regional): **European patent (DE, FR, GB, IT, SI).**

[Continued on next page]

(54) Title: **LAUNDRY SYSTEM INCLUDING HOME TERMINAL DEVICE AND LAUNDRY APPARATUS WITH COMMUNICATING FUNCTION**

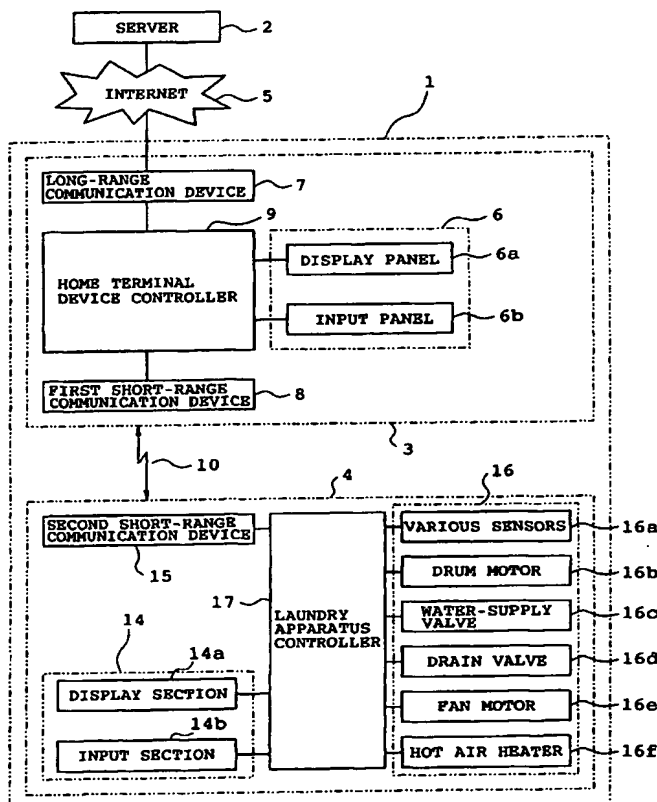

(57) Abstract: A laundry system (1) includes a home terminal device (3) and laundry apparatus (4). The terminal device includes a first short-range communication device (8), a long-range communication device (7), and a terminal device controller (9) transmitting information about laundry and information about a laundry constraint to a server (2) connected to an Internet (5), thereby obtaining an operation control program for the laundry apparatus. The terminal device controller transfers the obtained operation control program via the first short-range communication device to the laundry apparatus and receives via the first short-range communication device information about an operating state of the laundry apparatus. The laundry apparatus includes a second short-range communication device (15), a laundry apparatus controller (17), and a laundry unit (16). The laundry apparatus controller receives the operation control program via the second short-range communication device from the terminal device to control the laundry unit and transfers the information about the operating state of the laundry apparatus via the second short-range communication device to the terminal device.

WO 03/062516 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## DESCRIPTION

LAUNDRY SYSTEM INCLUDING HOME TERMINAL DEVICE AND  
LAUNDRY APPARATUS WITH COMMUNICATING FUNCTION

5

## TECHNICAL FIELD

This invention relates to a laundry system including a home terminal device communicating via an Internet or the like with a server storing and providing a database which is a large collection of data of optimum operating conditions for laundry apparatus and a laundry apparatus communicating with the terminal device.

10

## BACKGROUND ART

15

Almost all the conventional laundry apparatus such as automatic washing and drying combination machines, automatic washing machines and automatic dryers include respective microcomputers for controlling operations of the laundry apparatus. Each such microcomputer includes a memory on which a multiple of operation control programs corresponding to a multiple of operating (or washing and/or drying) conditions are previously stored. When a user operates an operation panel to set desired operating conditions prior to the start of laundry, an operation control program corresponding to the set operating conditions is read out from the memory, and the operation of the laundry apparatus is controlled on the basis of the read operation control program.

20

25

Recently, various types of clothes have been produced using various types of fibers and the number of types of detergents have also been

increased. With increase in the types of fibers and detergents, users have had difficulties in setting optimum operating conditions suitable for the various conditions. As a result, unsuitable operating conditions have been set in the laundry apparatus, whereupon the laundry undergoes  
5 damage and/or shrinkage or results in inconveniences such as allergy.

Furthermore, in the foregoing case where the memory provided in the laundry apparatus previously stores the multiple of operation control programs, it is difficult to add a new operation control program corresponding to new clothes woven of a new fiber or to new types of  
10 detergents.

## DISCLOSURE OF THE INVENTION

Therefore, an object of the present invention is to provide a laundry  
15 system in which an optimum operating condition determined in consideration of types of clothes, types of detergents, etc. can be set without the user relying upon his or her experiences and intuition and laundry can be carried out under a set optimum operating condition.

The laundry system of the present invention operates on the  
20 premise that a server exists which provides laundry control information and stores a database storing and providing various pieces of information about laundry such as types of clothes, types of detergents, possible combinations of types of clothes and detergents, and an operation control program of the laundry apparatus to realize an optimum operation  
25 corresponding to the foregoing combination.

The present invention provides a laundry system comprising a terminal device and laundry apparatus. The terminal device includes a display panel, input panel, first short-range communication device,

long-range communication device, and terminal device controller. The terminal device controller controls the input panel and the display panel. The terminal device controller further controls the long-range communication device to transmit an inquiry via the long-range communication network such as the Internet or wireless telephone to the server and to receive a reply to the inquiry. The terminal device controller further controls the first short-range communication device to transmit necessary information to the laundry apparatus by means of Bluetooth wireless communication or a short-range communication network such as wireless LAN and to receive information about an operating state of the laundry apparatus.

The laundry apparatus includes an operation panel, a second short-range communication device, a laundry apparatus controller and a laundry (washing and/or drying) unit. The laundry apparatus controller receives the operation control program via the second short-range communication device from the terminal device thereby to control the laundry unit so that laundry is washed and/or dried. The laundry apparatus controller further transmits the information about the operating state of the laundry apparatus via the second short-range communication device to the terminal device.

The user operates the input panel of the terminal device to input a type of clothes, a type of detergent to be used, a desired incidental condition (laundry option), etc. The terminal device transmits input conditions to the server and receives an optimum operation control program meeting the conditions from the server. The terminal device further transmits the received program to the laundry apparatus controller. The laundry apparatus controller controls the laundry unit according to the received operation control program so that clothes are washed and/or

dried. The laundry apparatus controller further transmits the information about the operating state of the laundry apparatus and results of operation to the terminal device. Thus, washing and/or drying the laundry is carried out as the result of the foregoing operation. Consequently, the user can  
5 get an optimum result of laundry for the clothes with an easy operation without relying upon his or her experiences and intuition.

### BRIEF DESCRIPTION OF THE DRAWINGS

10 FIG. 1 is a block diagram of the laundry system of one embodiment in accordance with the present invention, together with a server;

FIG. 2 is a front view of a terminal device;

FIG. 3 illustrates a case where the terminal device is used as common to various household electric appliances;

15 FIG. 4 illustrates an operation panel of a laundry apparatus;

FIG. 5 illustrates a menu screen of the terminal device;

FIG. 6 illustrates a "washing service" screen which is a menu screen for the laundry system;

20 FIG. 7 illustrates a "washing navigation" screen which is a list of major group clothes;

FIG. 8 illustrates a "bedding and bulk" screen which is a list of minor group clothes;

FIG. 9 illustrates a "washing curtain" screen corresponding to a "curtain" which is one of the minor group clothes;

25 FIGS. 10A and 10B show an operation control program corresponding to "bedding and bulk" which is a list of minor group clothes;

FIGS. 11A and 11B show an operation control program corresponding to "everyday clothes" which is one of the minor group

clothes;

FIG. 12 shows a screen of "under transmission";

FIG. 13 shows a screen indicative of "to those who are allergic (atopic etc.)";

5        FIG. 14 shows a screen indicative of "setting of atopy care has been completed";

FIG. 15 shows a screen indicative of "about used detergent";

FIG. 16 shows a screen indicative of "under use of powdered synthetic detergent";

10       FIG. 17 shows a screen indicative of "setting of detergent used has been completed";

FIG. 18 shows a screen indicative of "case where noise-reduced operation is desired";

15       FIG. 19 shows a screen indicative of "noise-reduced course has been set";

FIG. 20 shows a screen indicative of "operating state of laundry apparatus";

FIG. 21 shows a screen indicative of "en route alteration of operation contents";

20       FIG. 22 shows a screen indicative of "clothes allowed to be added";

FIG. 23 shows a screen indicative of "everyday clothes allowed to be added";

FIG. 24 shows a screen indicative of "standby state of laundry apparatus";

25       FIG. 25 shows a screen indicative of "alteration of operational contents";

FIG. 26 shows a screen indicative of "confirmation of desired time";  
and

FIG. 27 shows a screen indicative of "caution".

### BEST MODE FOR CARRYING OUT THE INVENTION

5        One embodiment of the present invention will be described with reference to the accompanying drawings. Referring to FIG. 1, an overall hardware arrangement of a laundry system 1 in accordance with the invention is shown as connected via the Internet to a server 2 providing laundry control information. The laundry system 1 comprises a home  
10   terminal device 3 and a laundry apparatus 4. The laundry system 1 operates on the premise that the server 2 has already been established. The server 2 is connected to a long-range communication network such as an Internet 5 or wireless telephone network. The server 2 is provided with a laundry control information database (hereinafter, "database")  
15   storing comprehensive information about laundry general and control of laundry apparatus. The database comprises a relational database, for example and is managed by a relational database management system (RDBMS). When receiving an inquiry about laundry from the terminal device 3, the server 2 retrieves the database to extract a reply from the  
20   database by means of RDBMS, providing the reply to the terminal device 3, as will be described later.

      The database stores information about types of clothes and used fibers, information about detergents, combined information about types of clothes and types of detergents allowed to be used, combined information  
25   about clothes unsuitable for washing them with other types of clothes, information about preparation prior to laundry, information about notices regarding laundry, information about allergy to detergent, information about clothes allowed to be added during washing, information about



optimum laundry conditions corresponding to clothes and detergents to be used, an optimum operation control program of laundry apparatus corresponding to each laundry condition, and an operation control program for an operation with noise reduction. Installation of the server 2 and  
5 renewal of database are usually carried out by a manufacturer of the laundry apparatus.

The terminal device 3 includes a display panel 6a, an input panel 6b, a long-range communication device 7, a first short-range communication device 8 and a terminal device controller 9. The long-range  
10 communication device 7 accesses the server 2 via a long-range communication network such as the Internet 5 or a wireless telephone network. The first short-range communication device 8 transmits and receives information to and from the laundry apparatus 4 via a short-range communication network such as wireless communication by means of  
15 Bluetooth or wireless LAN.

The display panel 6a and the input panel 6b serve as a man-machine interface between the terminal device 3 and the user. Referring to FIG. 2, the terminal device 3 includes a liquid-crystal touch panel 6 serving both as the display panel 6a and as the input panel 6b. The terminal device 3  
20 further includes a "power" switch 11 and a "home" switch 12 which is operated to call a menu screen of the terminal device 5.

The terminal device controller 9 controls the overall terminal device 3. Since the single terminal device 3 incorporates a microcomputer (not shown), it may serve for other household control systems such as a  
25 refrigerator system, microwave oven system, air-conditioner system as well as for the laundry system 4. Furthermore, the single terminal device 3 may serve for a plurality of laundry systems. FIG. 3 schematically illustrates a case where the terminal device is used as common to various

household electric appliances. Additionally, the terminal device 3 may have an e-mail function.

The laundry apparatus 4 may be an automatic washer-drier, automatic washing machine, automatic drier, etc. The laundry apparatus 4 is an automatic washer-drier in the embodiment. Where the laundry apparatus 4 is applied to an automatic washing machine or an automatic drier, one or more unnecessary functions may be eliminated from those of the apparatus 4 which will hereinafter be described. The laundry apparatus 4 comprises an operation panel 14 including a display section 14a and an input section 14b, a short-range communication device 15, a laundry (washing and/or drying) unit 16 and a laundry apparatus controller 17. The laundry unit 16 is directly related to clothes washing and drying operations and comprises various sensors 16a, a drum motor 16b, a water-supply valve 16c, a drain valve 16d, a fan motor 16e, a warm air heater 16f, a drum (not shown), a water-supply hose, etc. Various sensors 16a include a water-level sensor, a temperature sensor and a weight sensor. The short-range communication device 15 is provided for communication with the terminal device 3.

The laundry apparatus controller 17 includes a microcomputer (not shown) and controls an overall operation of the laundry apparatus 4. The operation panel 14 serves as a man-machine interface between the terminal device 3 and the user. The laundry apparatus 4 is arranged so that a user can directly set laundry conditions on the operation panel 14 for the running of the laundry apparatus 4 when no terminal device 3 is provided or when the terminal device 3 has failed.

Referring now to FIG. 4, the operation panel 14 of the laundry apparatus 4 is shown. The operation panel 14 includes a wash time setting switch 19, a rinse setting switch 20, a dehydration time setting

switch 21, a drying time setting switch 22, a reservation setting switch 23, a hot water setting switch 24, a course setting switch 25, a drying setting switch 26, a bathwater setting switch 27, all of which are provided for setting laundry conditions, and a power switch 28 and a start switch 29.

5       The operation panel 14 includes a wash time display 30, a rinse time display 31, a dehydration time display 32, a drying time display 33, a wash step display 34, a rinse step display 35, a dehydration step display 36, a drying step display 37, a display 38 for a remaining time or detergent quantity, a display 39 for various courses, an internet course display 40  
10       displaying that the operation is based on the operation control program from the server 2, and a "communication" display 41 displaying that the laundry apparatus 4 is under communication with the terminal device 3, all of which display the operating state of the laundry apparatus.

      The operation of the laundry system 1 will now be described.  
15       When the user turns on the power switch 11 of the terminal device 3, the terminal device controller 9 displays a screen as shown in FIG. 5 on the touch panel 6. A terminal menu screen 42 is displayed on a section E. Various screens are displayed on the section E of the touch panel 6. The portion of the touch panel 6 other than the section E is a fixed screen  
20       which is not switched and is not directly related with the operation of the laundry system except for the upper monitor switch s51. The screen as shown in FIG. 5 can be re-displayed every time the switch 12 as shown in FIG. 2 is touched during an ON-state of the power supply of the terminal device 3. Furthermore, the terminal menu screen 42 can also be  
25       re-displayed every time a menu switch s52 is touched.

      The terminal menu screen 42 displayed on the section E as shown in FIG. 5 is used commonly as terminal devices of other systems. Accordingly, switches and displays for the other systems are provided.

The terminal menu screen 42 includes a washing service switch s53 and a display d53 both related with the laundry system 1.

The user firstly touches the "washing service" switch s53 in order that the washing may be started. Then, the terminal device controller 9  
5 obtains from the server 2 a "washing service" screen 43 as shown in FIG. 6, displaying the screen on the section E of the touch panel 6. The "washing service" screen 43 corresponds to a menu screen of the laundry system 1. Menus of the laundry system 1 include a first menu of "service for transmission of operation contents suitable for laundry," a second  
10 menu of "to those who are allergic (atopic etc.)," a third menu of "about used detergent" and a fourth menu of "when noise-reduced operation is desired." Switches s61 to s64 and displays d61 to d64 are provided so as to correspond to the menus respectively.

The contents of each menu will now be described. The first menu  
15 is provided for designating clothes to be washed, obtaining an optimum operation control program for the clothes, and transmitting the program to the laundry apparatus 4. The other three menus are provided for designating constraints necessary when the server 2 retrieves and determines optimum operating conditions. The constraints will  
20 hereinafter be referred to as "laundry constraints."

Firstly, the operation will be described in a case where no laundry constraints are designated. The user first touches the switch s61 corresponding to the menu, "service for transmission of operation contents suitable for laundry." The terminal device controller 9 then obtains a  
25 "washing navigation" screen 44 as shown in FIG. 7 from the server 2, displaying the screen on the touch panel 6. The "washing navigation" screen 44 provides major groups of clothes to be washed. The screen 44 in FIG. 7 exemplifies eight major groups corresponding to respective

switches s71 to s78 and respective display sections d71 to d78. The user selects one of the major groups to which clothes to be washed belong, touching a switch corresponding to the selected major group. For example, when the user touches the switch s74 corresponding to the major group of "bedding and bulk," the terminal device controller 9 obtains from the server 2 a screen 45 indicative of minor groups corresponding to the selected major group, displaying the obtained screen on the touch panel 6 as shown in FIG. 8 exemplifying a case where the selected major group includes eight minor groups corresponding to respective switches s81 to s88 and respective display sections d81 to d88.

The user then selects one of the eight minor groups displayed on the screen 45, touching a switch corresponding to the selected minor group. For example, when a "curtain" switch s85 has been selected, the terminal device controller 9 obtains from the server 2 a screen 46 of "curtain washing" corresponding to the minor group of "curtain," displaying the obtained screen 46 on the touch panel 6 as shown in FIG. 9. The "curtain washing" screen 46 displays guide information containing notices, preparation, recommended detergent, etc. Thus, the screen 46 serves as a guide-information screen providing guide information regarding washing of the selected minor group. A "reserved course" switch s92 is provided on the lower part of the screen 46. When the switch s92 is touched, a screen (not shown) on which a desired finish time is set is displayed. When the finish time is set, a start time of the laundry apparatus 4 is automatically adjusted so that the operation of the laundry apparatus is finished at the set finish time.

The user then touches a "transmission" switch s93 on the "curtain washing" screen 46 after completion of setting regarding the clothes to be washed. The terminal device controller 9 then transmits information of

the selected major and minor groups to the server 2 using the long-range communication device 7. The server 2 retrieves from the database an optimum operation control program corresponding to the clothes of the received minor group, transmitting the program to the terminal device controller 9. FIGS. 10A, 10B, 11A and 11B illustrate examples of operation control programs the server 2 transmits to the terminal device controller 9 respectively. FIGS. 10A and 10B illustrate an operation control program for all the clothes of the minor group belonging to the major group of "bedding and bulk." FIGS. 11A and 11B illustrate an operation control program for all the minor group clothes belonging to the major group of "everyday clothes." However, only an operation control program for the selected clothes of the minor group is actually transmitted. Accordingly, when "curtain" has been selected, only the washing conditions for "curtain" in FIGS. 10A and 10B are transmitted to the terminal device controller 9.

Each of FIGS. 10A, 10B, 11A and 11B includes one or more minor groups in each of which two operation control programs are prepared depending upon the weight of clothes. Regarding these minor groups, two operation control programs are transmitted to the laundry apparatus 4. The weight sensor of the laundry apparatus 4 measures the weight of the clothes put into the laundry apparatus. Which of the two programs is employed is determined on the basis of the result of measurement. The terminal device controller 9 temporarily stores the received operation control program for "curtain" in an internal memory and then displays major groups of the received operation control program on an operation condition display section d91 of the screen 46 of "curtain washing."

The terminal control device 9 then displays a screen 47 of "under transmission" as shown in FIG. 12 on the touch panel 6. The screen 47

urges the user to turn on the laundry apparatus and to depress the start switch 29. Power is supplied to all the devices of the laundry apparatus 4 when the user depresses the ON switch 28a of the power switch 28, following the instructions of the screen 47. The laundry apparatus controller 17 informs the terminal control device 9 of turn-on of the laundry apparatus 4, using the short-range communication device 15. In this case, it is preferable to inform of the type name and type number of the laundry apparatus as well as turn-on of the laundry apparatus. When receiving the information of turn-on of the laundry apparatus 4, the terminal control device 9 transmits an operation control program for the stored minor group of "curtain" to the laundry apparatus 4.

The laundry apparatus controller 17 transmits the received operation control program to the operation panel 14 as shown in FIG. 4. Following the contents of the operation control program, the controller 17 turns on the corresponding ones of the display sections d30 to d40 of the operation panel 14 or displays numerals on the corresponding display sections.

When the user depresses the start switch 29 in the aforesaid condition, the controller 17 starts controlling the laundry unit 16 on the basis of the received operation control program, so that a wash step is initiated. However, when a desired finish time has been set by the use of a "reserved course" switch 92a as described above, an actual start of the operation is delayed to a time obtained by subtracting a required laundry time period from the desired finish time.

The following describes a case where laundry is initiated with the laundry constraints designated. Firstly, a case will be described where the menu of "to those who are allergic (atopic etc.)" has been selected on the "washing service" screen 43 (menu screen of laundry system 1) as

shown in FIG. 6. When the user touches the switch s62, the terminal control device 9 obtains the screen 48 of "to those who are allergic (atopic etc.)" as shown in FIG. 13 from the server 2, displaying the obtained screen on the touch panel 6. Pieces of guide information such as "why atopy occurs," "way of preventing atopy," etc. are displayed on an upper part of the screen 48. A lower part of the screen 48 is provided with a LINK 1 switch s131 and a LINK 2 switch s132. When each switch is touched, more detailed guide information about atopy is obtained from the server 2 to be displayed on the touch panel 6.

10 A central part of the screen 48 is provided with an "atopy care" switch s133 and a corresponding display section d133. The switch s133 is selected when the user desires a washing manner which tends not to cause atopy. A constraint of "atopy care" is set and the terminal controller 9 stores information that the constraint of "atopy care" has been set. At the same time, a screen 49 of "setting for atopy care has been completed" as shown in FIG. 14 is displayed, displaying that setting constraint of "atopy" care has been completed. When the aforesaid "transmission" switch s93 is touched with the constraint of "atopy care" set, the terminal controller 9 transmits to the server 2 information that the constraint of "atopy care" (when constraints of "setting of used detergent" and "noise-reduced course" have been set as will be described later, these pieces of information are included) has been set in addition to information about selected major and minor groups. When retrieving from the data base an optimum operation control program corresponding to the received minor group of clothes, the server 2 retrieves and determines an optimum operation control program in consideration of the set constraint of "atopy care" (when constraints of "setting of used detergent" and "noise-reduced course" have been set, these pieces of information are included), then



transmitting it to the terminal controller 9. When the option of "atopy care" is set, an operation control program retrieved and determined contains a larger number of times of rinsing and a larger amount of water than when the option of "atopy care" is not set.

5       Next, a case will be described where the menu of "about used detergent" has been selected on the washing service screen 43 (menu screen of laundry system 1) as shown in FIG. 6. When the user touches the switch s63, the terminal controller 9 obtains the screen 50 of "about used detergent" as shown in FIG. 15 from the server 2, displaying the  
10       obtained screen on the touch panel 6. Pieces of guide information such as "types of detergents, detergent usable for home laundry," etc. are displayed on an upper part of the screen 50. A lower part of the screen 50 is provided with a LINK 1 switch s156, a LINK 2 switch s157 and a LINK 3 switch s158. When each switch is touched, more detailed guide  
15       information about used detergent is obtained from the server 2 to be displayed on the touch panel 6.

      The screen 50 includes in its central part a "powdered synthetic detergent" switch s151, "liquid synthetic detergent" switch s152, "liquid soap" switch s153, "liquid detergent" switch s154 and "liquid neutral  
20       detergent" switch s155 all representative of detergent types and corresponding display sections d151 to d155 respectively. When desiring a washing manner according to a used detergent, the user selects one of the five types of detergents, depressing the corresponding switch. For example, when the user selects the "powdered synthetic detergent" and  
25       touches the switch s151, the terminal controller 9 obtains from the server 2 a screen 52 of "case where powdered synthetic detergent is used" as shown in FIG. 16, displaying the obtained screen on the touch panel 6.

      Guide information of "notices of use" is displayed on an upper part

of the screen 51. A lower part of the screen 51 is provided with a switch s161 for setting control for operation with use of powdered synthetic detergent and a corresponding display section d161. The user selects the switch s161 when a powdered synthetic detergent is used. The terminal controller 9 then stores information that "use of powdered synthetic detergent" has been set as a constraint of "set of used detergent." At the same time, a screen 53 of "setting of used detergent has been completed" as shown in FIG. 17 is displayed, displaying that setting constraint of "setting of used detergent" has been completed. When the aforesaid "transmission" switch s93 is touched with the constraint of "set of used detergent" set, the terminal controller 9 transmits to the server 2 information that the constraint of "powdered synthetic detergent is used" (when constraints of aforesaid "atopy care" and "noise-reduced course" have been set, these pieces of information are included) has been set as the constraint of "set of used detergent" in addition to information about selected major and minor groups.

When retrieving from the data base an optimum operation control program corresponding to the received minor group of clothes, the server 2 retrieves and determines an optimum operation control program in consideration of the set constraint of "powdered synthetic detergent is used" (when constraints of "atopy care" and "noise-reduced course" have been set, these pieces of information are included), then transmitting it to the terminal controller 9.

Next, a case will be described where the menu of "a case where noise-reduced operation is desired" has been selected on the washing service screen 43 (menu screen of laundry system 1) as shown in FIG. 6. When the user touches the switch s64, the terminal controller 9 obtains the screen 54 of "a case where noise-reduced operation is desired" as

shown in FIG. 18 from the server 2, displaying the obtained screen on the touch panel 6. Guide information of "clothes which can be set" relating to the setting of constraints of "noise-reduced course" is displayed on an upper part of the screen 54. A lower part of the screen 54 is provided with guide information of "notice." A central part of the screen 54 is provided with a "noise-reduced course" switch s181 for setting an operation for a noise-reduced course and a corresponding display section d181. The "noise-reduced course" denotes an operation of the laundry apparatus 4 with reduced noise. The switch s181 is selected when the user desires a noise-reduced operation. The terminal controller 9 then stores information that a constraint of "noise-reduced course" has been set. At the same time, a screen 55 of "setting of noise-reduced course has been completed" as shown in FIG. 19 is displayed, displaying that setting the constraint of "noise-reduced course" has been completed.

When the aforesaid "transmission" switch S93 is touched with the constraint of "noise-reduced course" set, the terminal controller 9 transmits to the server 2 information that the constraint of "noise-reduced course" (when constraints of aforesaid "atopy care" and "set of used detergent" have been set, these pieces of information are included) has been set in addition to information about selected major and minor groups.

When retrieving from the data base an optimum operation control program corresponding to the received minor group clothes, the server 2 retrieves and determines an optimum operation control program in consideration of the set constraint of "noise-reduced course" (when constraints of "atopy care" and "set of used detergent" have been set, these pieces of information are included), then transmitting it to the terminal controller 9. When the option of "noise-reduced course" is set, an operation control program retrieved and determined usually contains

reduced speed of drum motor 16b for rendering the washing time period longer than when the option of "noise-reduced course" is not set.

The following is the description of manipulation and operation for confirming a current operation of the laundry apparatus 4, altering the operation control program during execution thereof, and adding clothes. Each of these operations is initiated when a home appliance monitor switch s51 on the terminal menu screen 42 as shown in FIG. 5 is touched. Upon touch with the monitor switch s51, the laundry apparatus controller 17 is informed of the touch with the switch, then transmitting information about a current operating state of the laundry apparatus 4 to the terminal controller 9. The information includes progress in the washing and drying step, remaining time period to the completion of operation, set operation control program, etc.

Based on the received information, the terminal controller 9 displays an operating state of the laundry apparatus 4 on the touch panel 6. A screen to be displayed differs between a case where the laundry apparatus 4 is in operation and a case where the laundry apparatus 4 is on standby for a reserved operation. When the laundry apparatus 4 is in operation, an "operating state" screen 56 as shown in FIG. 20 is displayed. The screen 56 contains a step in execution, remaining time period, and operation control program, etc. The screen 56 includes an "operation content altering" switch s202. When the switch s202 is touched, the terminal controller 9 displays an "operation content altering" screen 57 as shown in FIG. 21. An upper part of the screen 56 includes a "wash" display section d211, "rinse" display section d212, "dehydration" display section d213, and "drying" display section d214. Each display section displays the content of the current operation control program which is set in the laundry apparatus 4. Of these display sections d211 to d214, those

displaying "automatic" refer to items which cannot be altered en route during operation. Switches s211a to s214a for increasing the displayed set values are provided to the right of the display sections respectively. Switches s211b to s214b for decreasing the displayed set values are also  
5 provided to the right of the display sections respectively. When desiring an alteration, the user operates these switches so that the set values are changed and then a lower "transmission" switch s216 is touched. As a result, data of a changed set value is transmitted from the laundry apparatus controller 17 of the laundry apparatus 4, whereby the operation  
10 control program is altered. Information about the foregoing changeable and unchangeable items is contained in the operation control program the terminal controller 9 receives from the server 2.

A case will then be described where the user has touched an "additional clothes" switch s203 provided in the lower part of a "laundry  
15 apparatus operating state" screen 56. In this case, the terminal controller 9 displays an "additional clothes" screen 58 as shown in FIG. 22. Since the information on the screen 58 is also stored on the data base of the server 2, the terminal controller 9 transmits to the server 2 information about the major and minor group clothes under washing, receiving and  
20 displaying a reply. The "additional clothes" screen 58 includes display sections d221 to d228 displaying additional clothes of the major group. The screen 58 has substantially the same arrangement as the aforesaid clothes of the major group screen 44 (FIG. 7). The display sections include those having bold names, that is, "everyday clothes" d221, "small  
25 articles" d226 and "children's clothing" d228. These display sections d221, d226 and d228 indicate major groups of additional clothes in this case. The other major groups whose names are shown void indicate those which are unsuitable for additional clothes. Regarding information of the

additional clothes of the major group, too, the terminal controller 9 transmits information of clothes (major and minor groups) under processing to the server 2, receiving and displaying a reply.

When desiring addition of clothes, the user selects and depresses a major group of clothes to be added from the switches s221 to s228. Assume now that the user has touched the "everyday clothes" switch s221. The terminal controller 9 then displays a screen 59 of "additional everyday clothes" as shown in FIG. 23. The screen 59 includes display sections d231 to d238 displaying minor classification clothes corresponding to the major group of "everyday clothes." The display sections d231 to d238 include those having bold names, that is, "shirt" d231, "T-shirt" s232, "socks" s233, "hand towel" s234, "bath towel" s235 and "cotton socks" s237. The other display sections of minor groups having void names indicate those which are unsuitable for additional clothes. Regarding information of the major groups of additional clothes, too, the terminal controller 9 transmits information of clothes (major and minor groups) under processing to the server 2, receiving and displaying a reply.

The user touches and selects one or more minor group switches of the clothes which are desired to be added. The user then touches a "transmission" switch s239 located in a lower part of the screen 59. The terminal controller 9 transmits to the server 2 information of major and minor groups of clothes which are desired to be added, information of currently selected major and minor groups of clothes and information of previously set constraints. The server 2 retrieves and composes a new operation control program on the data base in view of the afore-mentioned pieces of information, then replying to the terminal controller 9. The terminal controller 9 transmits the received new operation control program to the laundry apparatus 4. The laundry apparatus 4 is interrupted and

substitutes the received new operation control program for the previous one, thereafter restarting the operation.

A "laundry apparatus standby state" screen 60 as shown in FIG. 24 is displayed when the laundry apparatus 4 is on standby upon touch with the home appliance monitor switch s51. In a case where a desired finish time has been set by the "reserved course" switch s92 on the screen as shown in FIG. 9, the laundry apparatus 4 is on standby when a start time is not reached by reverse calculation using the desired finish time. On the screen 60, an indication of "reserved operation finish time" d241 is displayed instead of an indication of "time left until operation finish" d201 displayed on the afore-mentioned "laundry apparatus operating state" screen 56 (FIG. 20). The "reserved operation finish time" refers to the above-described desired finish time.

The screen 60 is provided with a "reserved time/operational content altering" switch s241. When the switch s241 is touched, the terminal controller 9 displays an "operational content altering" screen 61 as shown in FIG. 25. The screen 61 is similar to the aforesaid "operation content altering" screen 57 (FIG. 21). The screen 60 includes upper four display sections d251 to d254 indicating items of "wash," "rinse," "dehydration" and "drying" and corresponding switches s251a to s254a and s251b to s252b respectively. The display sections and switches have substantially the same functions as those of the screen 57.

The centrally located "alteration in the reserved time" display section d255 of the screen 60 displays a set desired finish time. When the user desires an alteration, a time increment switch s255a or a time decrement switch s255b is operated so that the time is changed to a new one. The lower "transmission" switch 257 is then touched. The terminal controller 9 obtains a start time by reverse calculation on the basis of the

changed desired time and then checks if the current time has not passed the start time. When the current time has passed the start time, a "desired time confirmation" screen 62 as shown in FIG. 26 is displayed. When the desired start time has been reached, the terminal controller 9  
5 informs that the operation of the laundry apparatus 4 will be started at once. The user touches the "transmission" switch s261 when the operation may be started at once. When the operation should not be started at once, the user touches a "return" switch s262, returning to the previous screen 61 to try the setting again. On the other hand, the  
10 terminal controller 9 transmits data of the changed desired finish time to the laundry apparatus controller 17 when the current time has not passed the start time or when the "transmission" switch s261 on the screen 62 has been touched. As a result, the desired finish time the data of which is stored by the laundry apparatus 4 is changed. The laundry apparatus  
15 controller 17 starts the operation of the laundry apparatus 4 at once when the current time has passed an operation start time obtained by reverse calculation on the basis of the changed desired finish time.

A case will then be described where the operation control program has been altered at the laundry apparatus 4 side. When the laundry  
20 apparatus 4 is in operation according to the operation control program transmitted thereto from the terminal controller 9, an "internet course" display section 40 on the operation panel 14 of the laundry apparatus 4 as shown in FIG. 4 is lit. When the user uses any one of the switches 19 to 27 of the operation panel 14 to alter the operation control program in the  
25 above-mentioned state, data indicating that the operation control program has been altered and data of changed contents are transmitted to the terminal controller 9. The terminal controller 9 then displays a "caution" screen 63 as shown in FIG. 27. The "caution" screen 63 displays that the



operation control program has been altered and the changed contents. Data of the changed contents of the operation control program is also transmitted to the server 2 at the same time. The server 2 compares the changed contents with the previous operation control program, thereby  
5 informing the user of caution when the caution is considered to arouse user's attention. The terminal controller 9 displays the contents of caution on a lower part of the "caution" screen 63, thereby arousing user's attention.

Laundry is carried out by the laundry system 1 in the  
10 above-described manipulation and operation. Consequently, the user can get an optimum effect according to the clothes with simplified manipulation without relying upon experience and intuition.

The present invention should not be limited by the foregoing embodiment and may be modified without departing from the scope thereof.  
15 For example, the server 2 may be informed of the type name and type number of the laundry apparatus 4 when the terminal controller 9 transmits major and minor groups of clothes to be washed and dried etc. to the server 2 and receives a reply of the operation control program. The server 2 may then retrieve and determine an optimum operation control  
20 program in view of the type name and type number. Consequently, a more effect may be achieved from laundry.

## INDUSTRIAL APPLICABILITY

25 As obvious from the foregoing description, the laundry system in accordance with the present invention has the advantage of setting an optimum operating condition determined in consideration of types of clothes, types of detergents, etc. without the user relying upon his or her

experiences an intuition and is particularly suitable for a household laundry system.

## CLAIMS

1. A laundry system comprising a terminal device and a laundry apparatus, the terminal device including:

5 a display panel;

an input panel;

a first short-range communication device;

a long-range communication device; and

10 a terminal device controller transmitting information about clothes as laundry and information about a laundry constraint both set on the input panel, to a server connected to a long-range communication network for providing laundry control information, using the long-range communication device, thereby obtaining an operation control program for the laundry apparatus on the basis of the two pieces of information, the terminal  
15 device controller transmitting the obtained operation control program via the first short-range communication device to the laundry apparatus, the terminal device controller receiving via the first short-range communication device information about an operating state of the laundry apparatus, displaying the information on the display panel; and the laundry  
20 apparatus including:

an operation panel;

a laundry unit;

a second short-range communication device; and

25 a laundry apparatus controller receiving the operation control program via the second short-range communication device from the terminal device to control the laundry unit so that laundry is washed and/or dried, the laundry apparatus controller transmitting to the terminal device the information about the operating state of the laundry apparatus

via the second short-range communication device.

2. A laundry system according to claim 1, wherein the terminal device controller obtains from the server a plurality of major groups of clothes to be laundered to display the obtained major groups on the display panel, the terminal device controller obtaining from the server a plurality of minor groups of clothes belonging to a selected one of the main groups, displaying the obtained minor groups on the display panel.

3. A laundry system according to claim 2, wherein the terminal device controller obtains from the server a piece of guide information about laundry of clothes belonging to a selected one of the minor groups to display the obtained information on the display panel.

4. A laundry system according to claim 3, wherein when two or more minor groups are designated as laundry, the terminal device controller obtains from the server an operation control program for the laundry apparatus in consideration of the two or more selected minor groups thereby to transfer the obtained operation control program to the laundry apparatus.

5. A laundry system according to claim 3, wherein when two or more minor groups are designated as laundry, the terminal device controller obtains from the server a piece of information as to whether it is appropriate for laundry of clothes belonging to the two or more minor groups, together, thereby to display the obtained information on the display panel.

6. A laundry system according to claim 1, wherein when a "noise-reduced" course has been selected as the laundry constraint, the terminal device controller obtains from the server the operation control program taking the selected laundry constraint into account, transferring  
5 the obtained operation control program to the laundry apparatus.

7. A laundry system according to claim 1, wherein when an "atopy care" course has been selected as the laundry constraint, the terminal device controller obtains from the server the operation control program  
10 taking the selected laundry constraint into account, transferring the obtained operation control program to the laundry apparatus.

8. A laundry system according to claim 1, wherein when a "detergent setting" course has been selected so that a detergent to be  
15 used has been designated, the terminal device controller obtains from the server the operation control program taking the selected laundry constraint into account, transferring the obtained operation control program to the laundry apparatus.

20 9. A laundry system according to claim 1, wherein the laundry apparatus controller notifies the terminal device via the first short-range communication device that a power supply of the laundry apparatus has been turned on, the terminal device confirms the notification and subsequently transmits the obtained operation control program to the  
25 laundry apparatus controller.

10. A laundry system according to claim 1, wherein when receiving via the input panel an instruction regarding addition of clothing, the

terminal device controller obtains from the server main and minor groups of clothes to be allowed to be added, displaying the obtained groups on the display panel, and when minor groups of clothes to be added are instructed via the input panel, the terminal device controller obtains from the server  
5 the operation control program taking addition of clothes into account, transmitting the obtained program to the laundry apparatus controller.

11. A laundry system according to claim 1, wherein the terminal device controller displays, on the display panel, a changeable item of the  
10 operation control program which has been transferred to the laundry apparatus controller, and when a change has been instructed via the input panel, the terminal device controller obtains from the server the operation control program taking instructed contents into account, transmitting the obtained operation control program to the laundry apparatus.

15

12. A laundry system according to claim 1, wherein when having received an instruction regarding a laundry finish time via the input panel, the terminal device controller transfers data of the laundry finish time to the laundry apparatus controller.

20


13. A laundry system according to claim 1, wherein when the operation panel of the laundry apparatus has been operated so that contents of the operation control program have been changed, the laundry apparatus controller transfers the changed contents of the operation  
25 control program to the terminal controller and displays the changed contents of the operation control program on the display panel.

14. A laundry system according to any one of claims 1 to 8, 10 and


11, wherein the laundry apparatus controller transmits data of a model name of the laundry apparatus via the first short-range communication device to the terminal device.

- 5           15. A laundry system according to any one of claims 1 to 8, 10 and 11, wherein the terminal controller transmits data of a type number of the laundry apparatus to the server to obtain an operation control program taking the transmitted data of the type number of the laundry apparatus into account, instead of the previous operation control program.


1/29

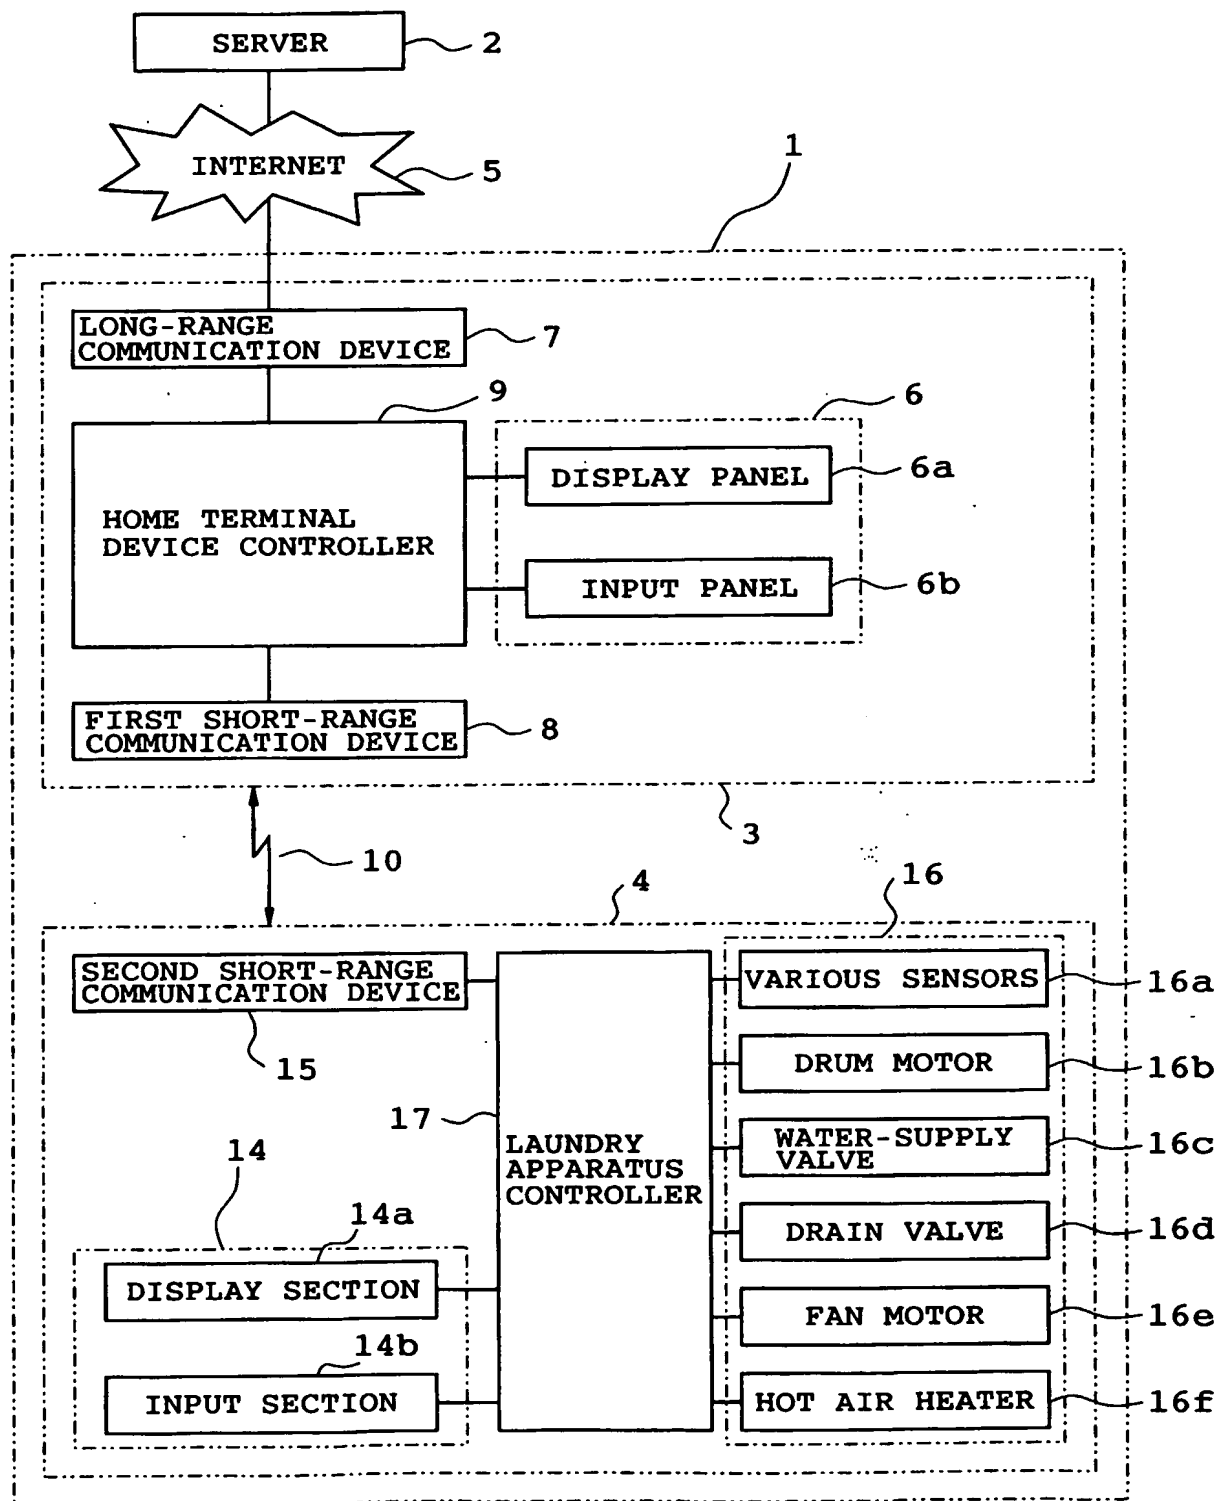**FIG. 1**

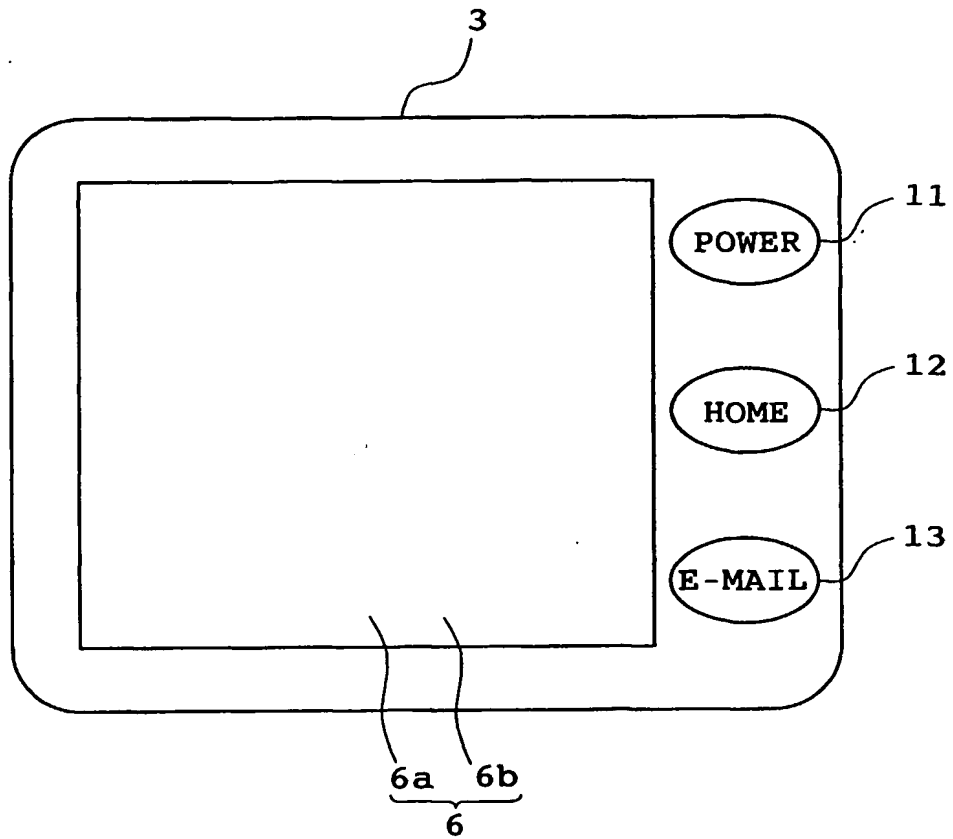

**FIG. 2**

3/29

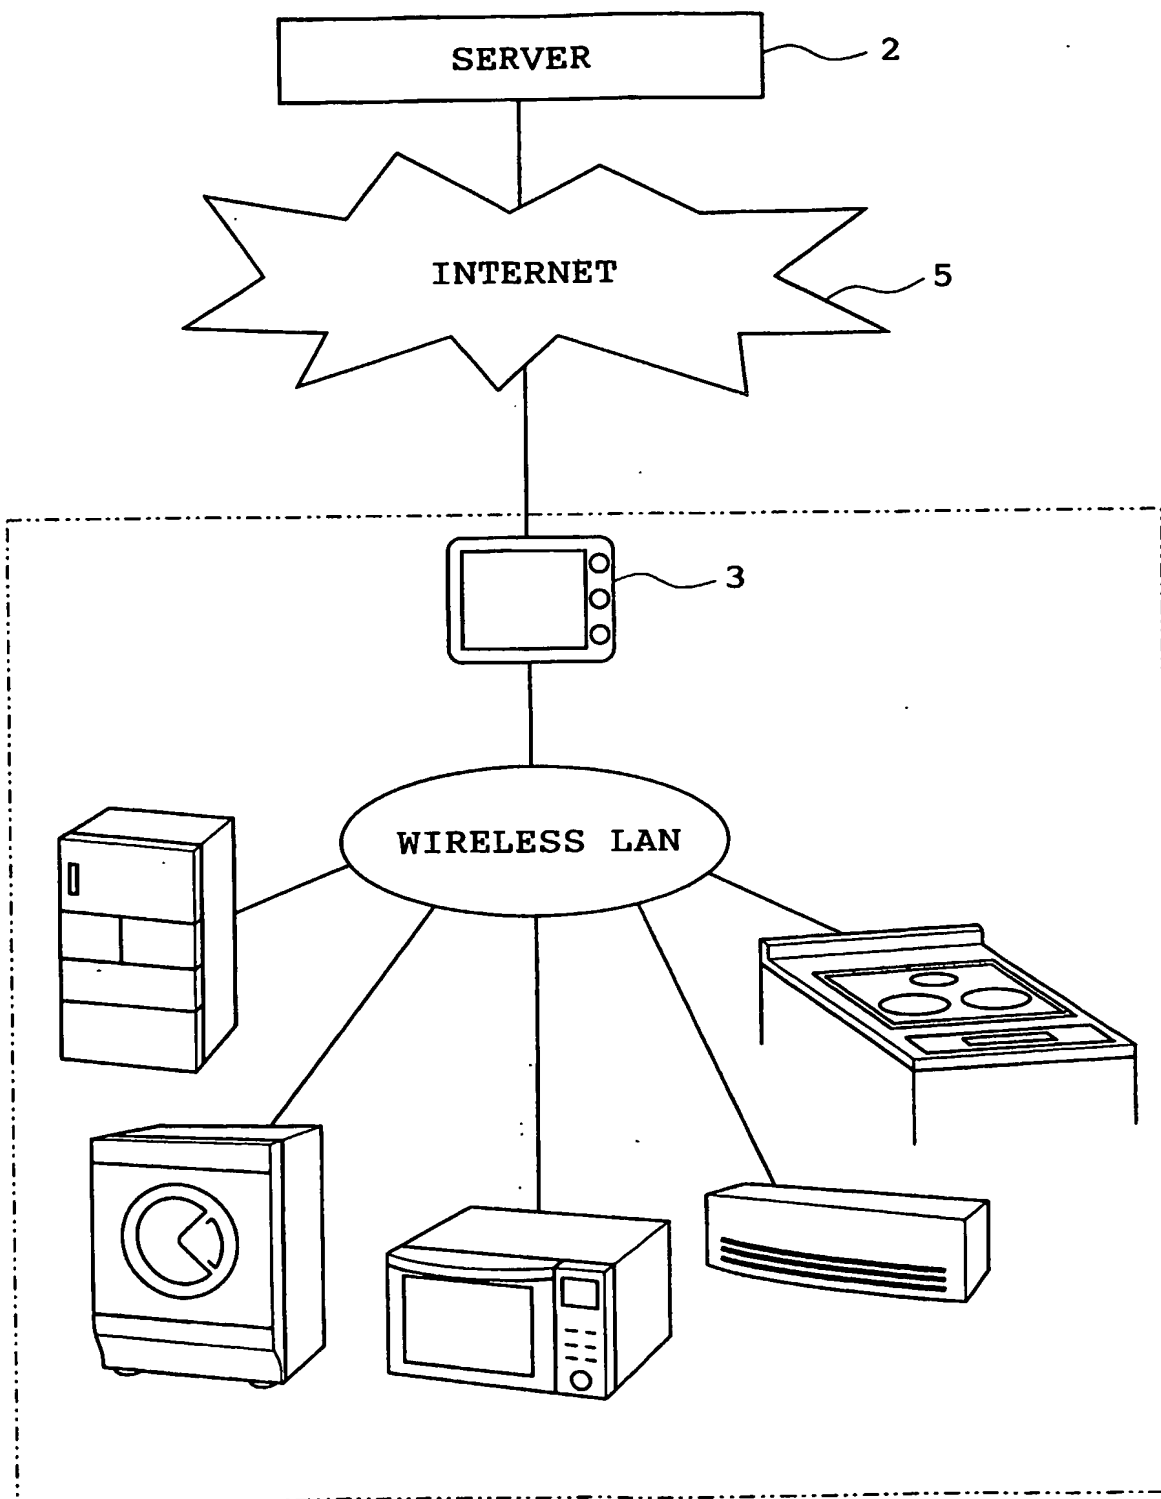**FIG. 3**

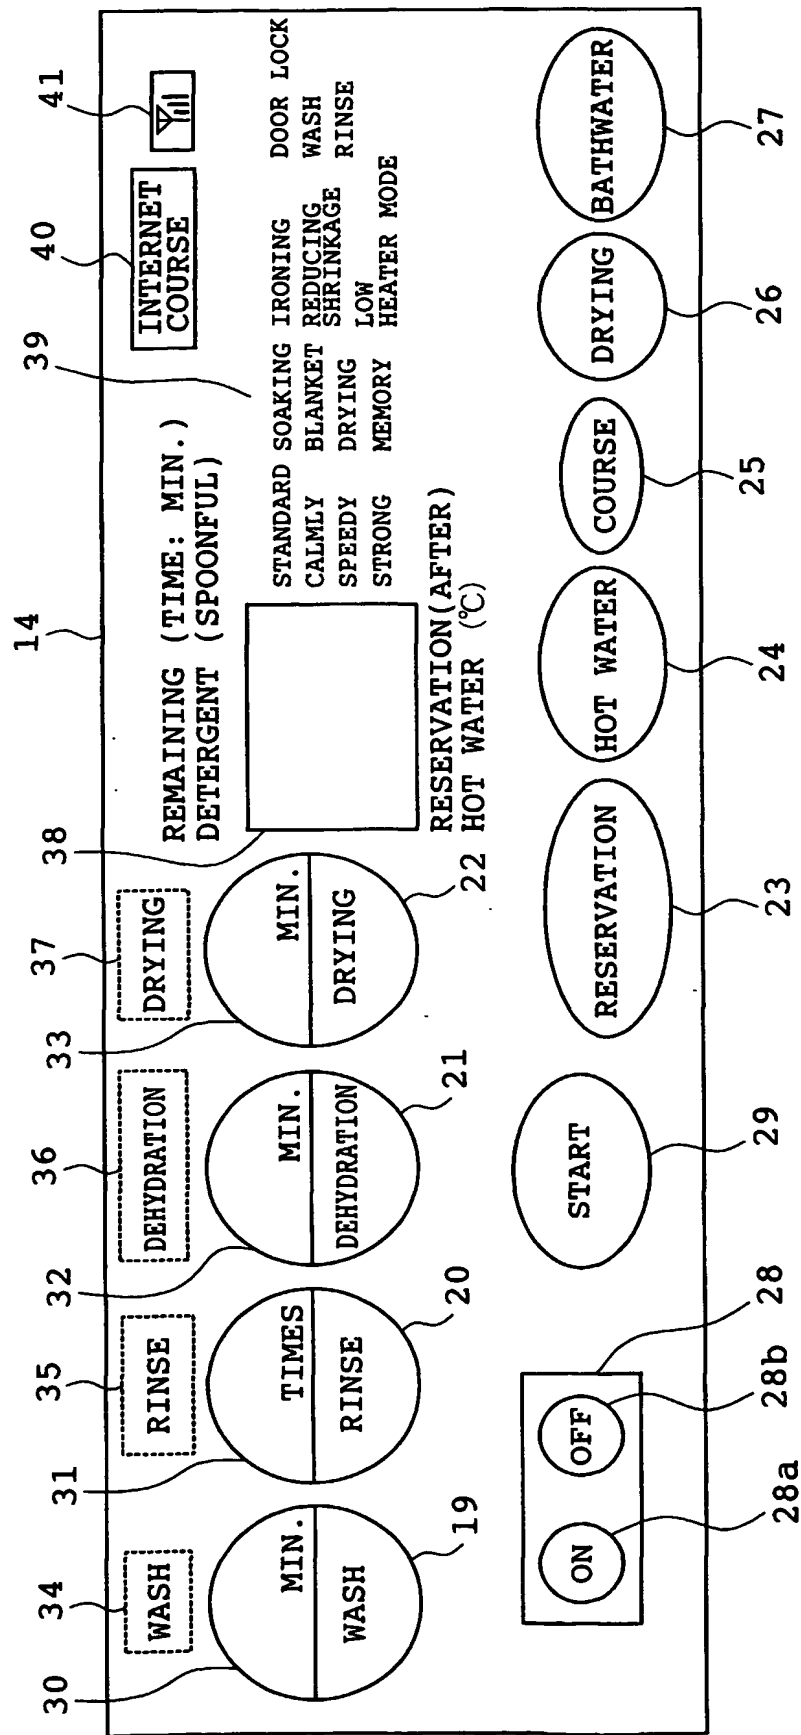


FIG. 4

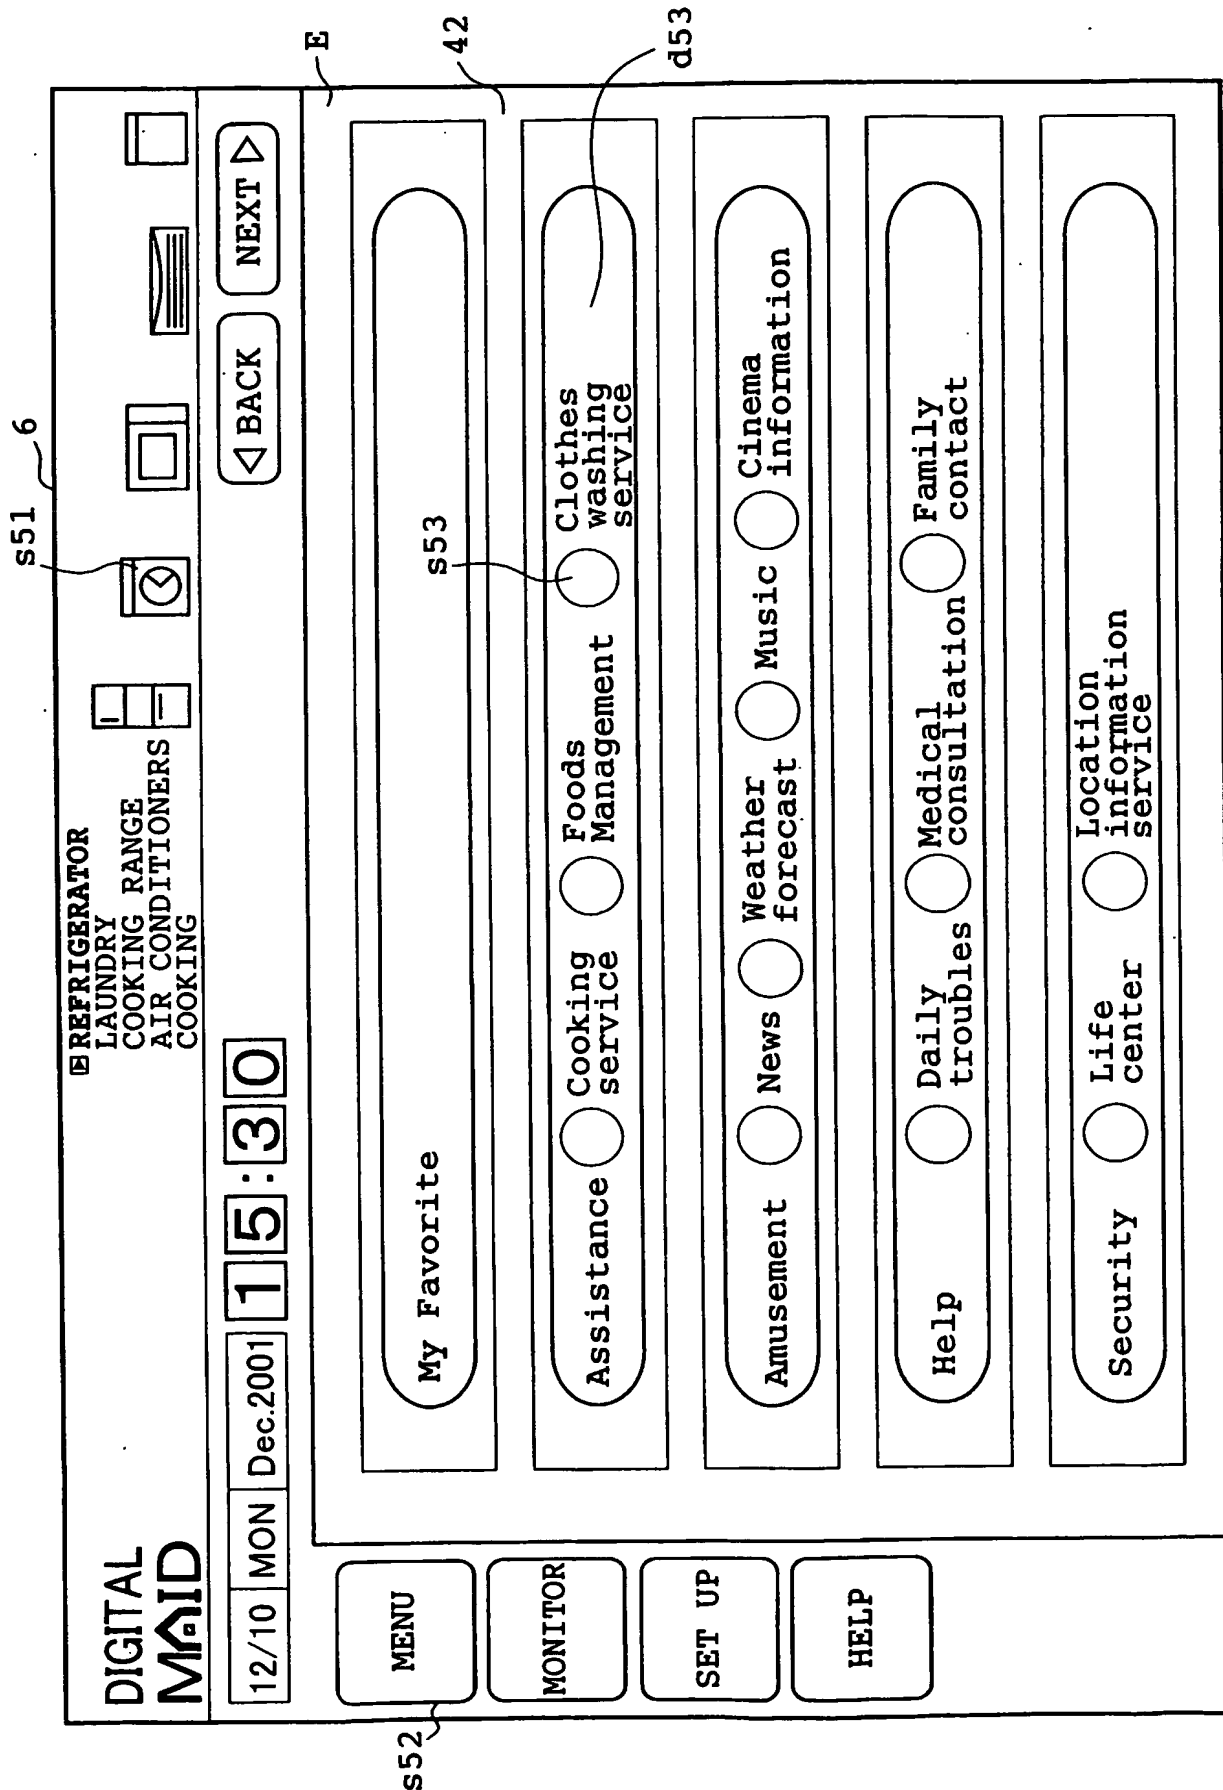


FIG. 5

6/29

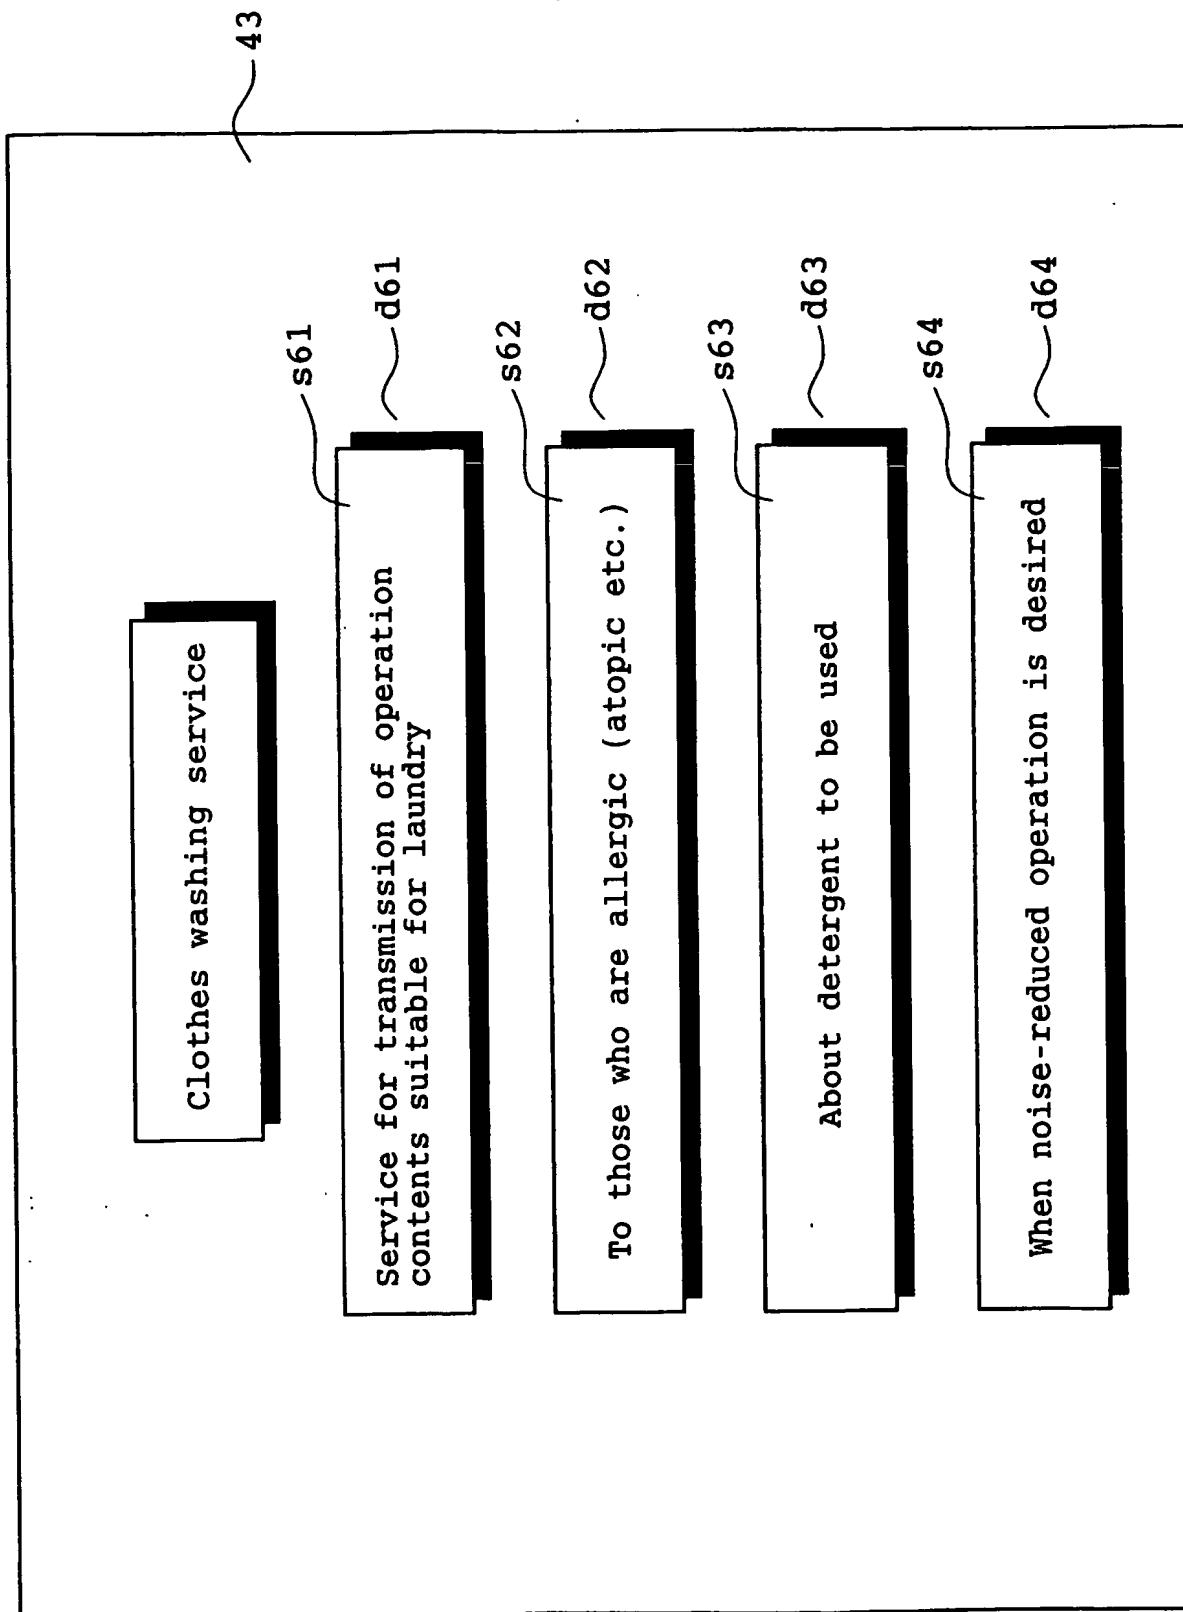


FIG. 6

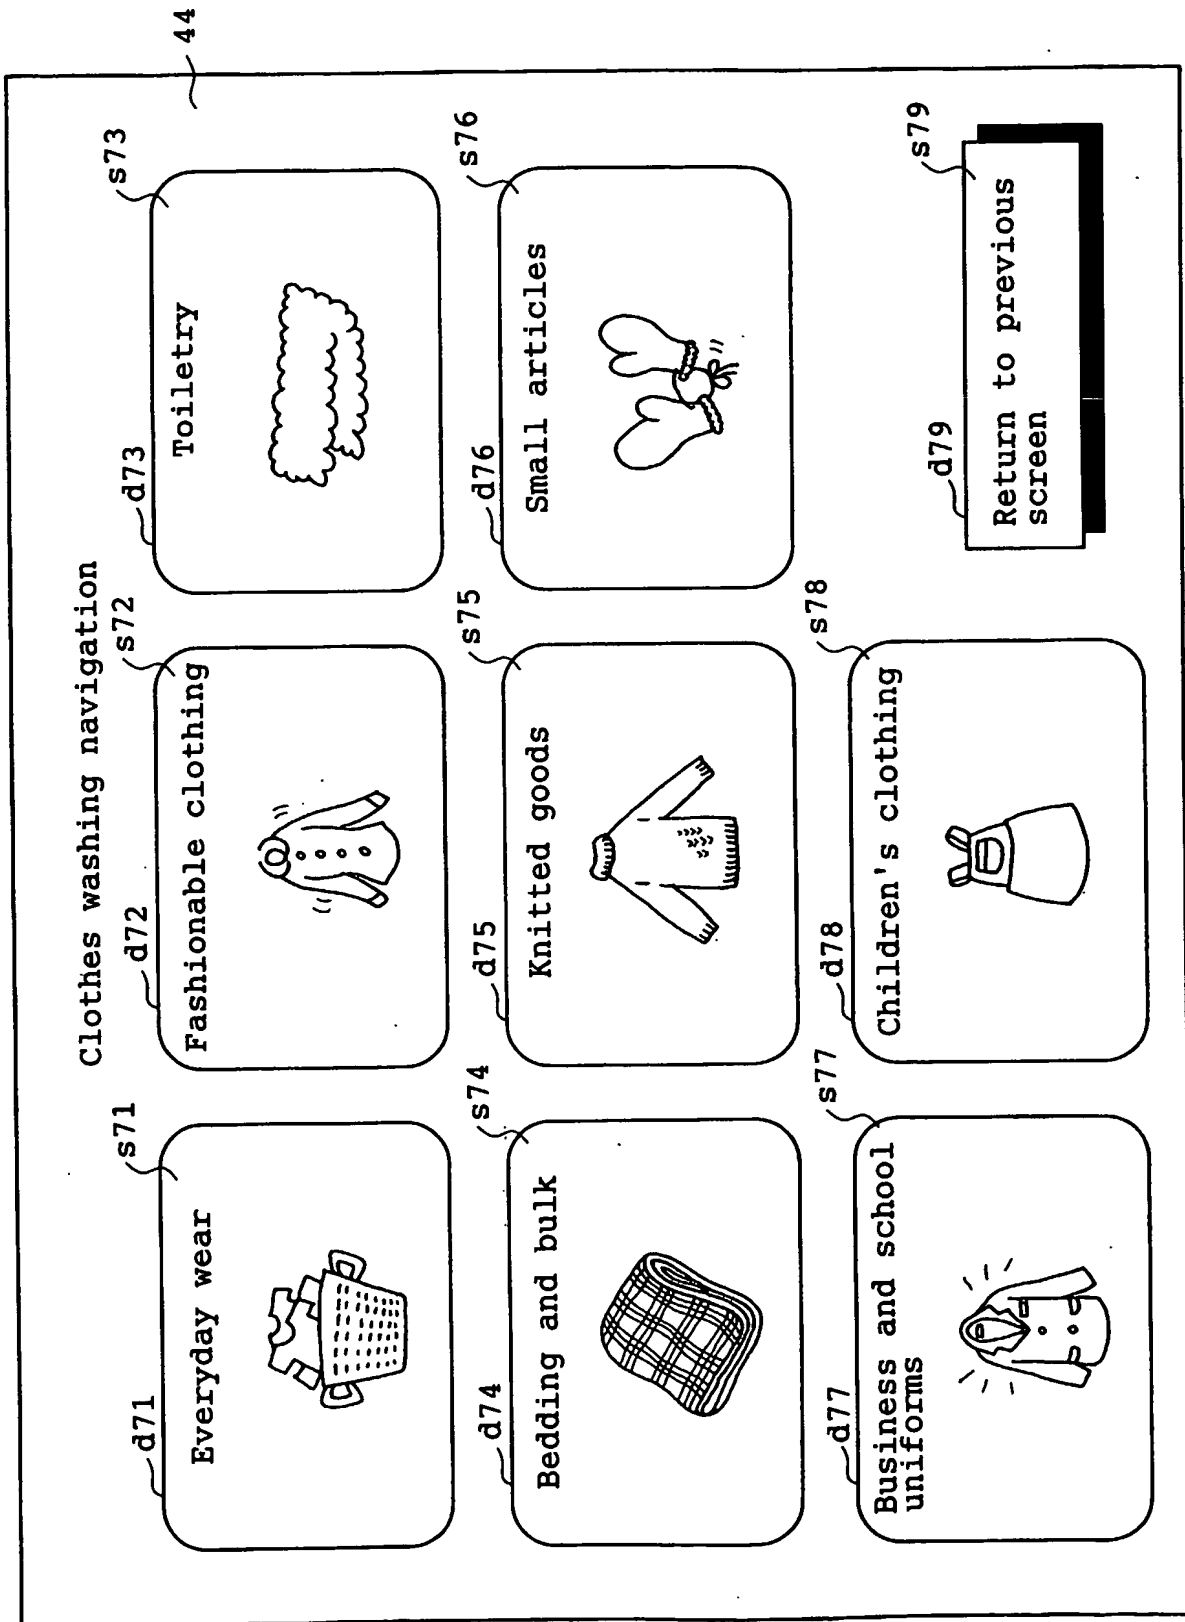


FIG. 7

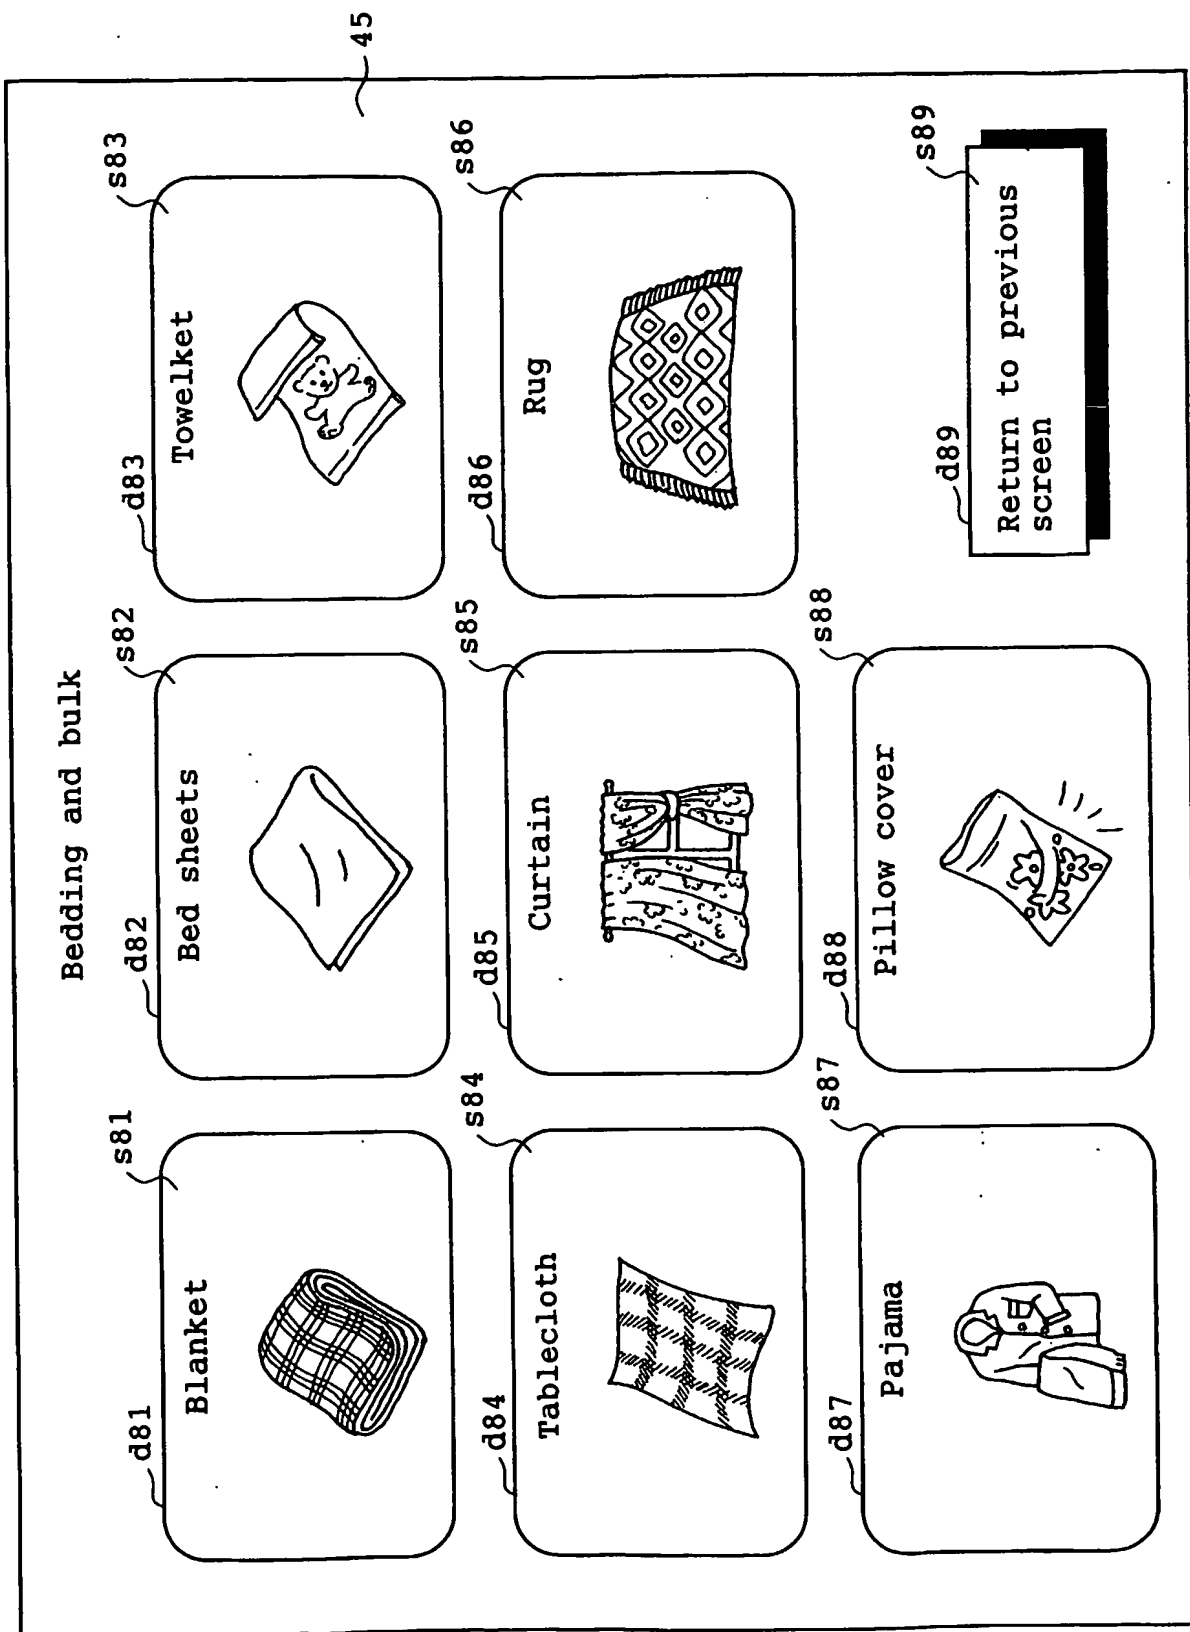


FIG. 8

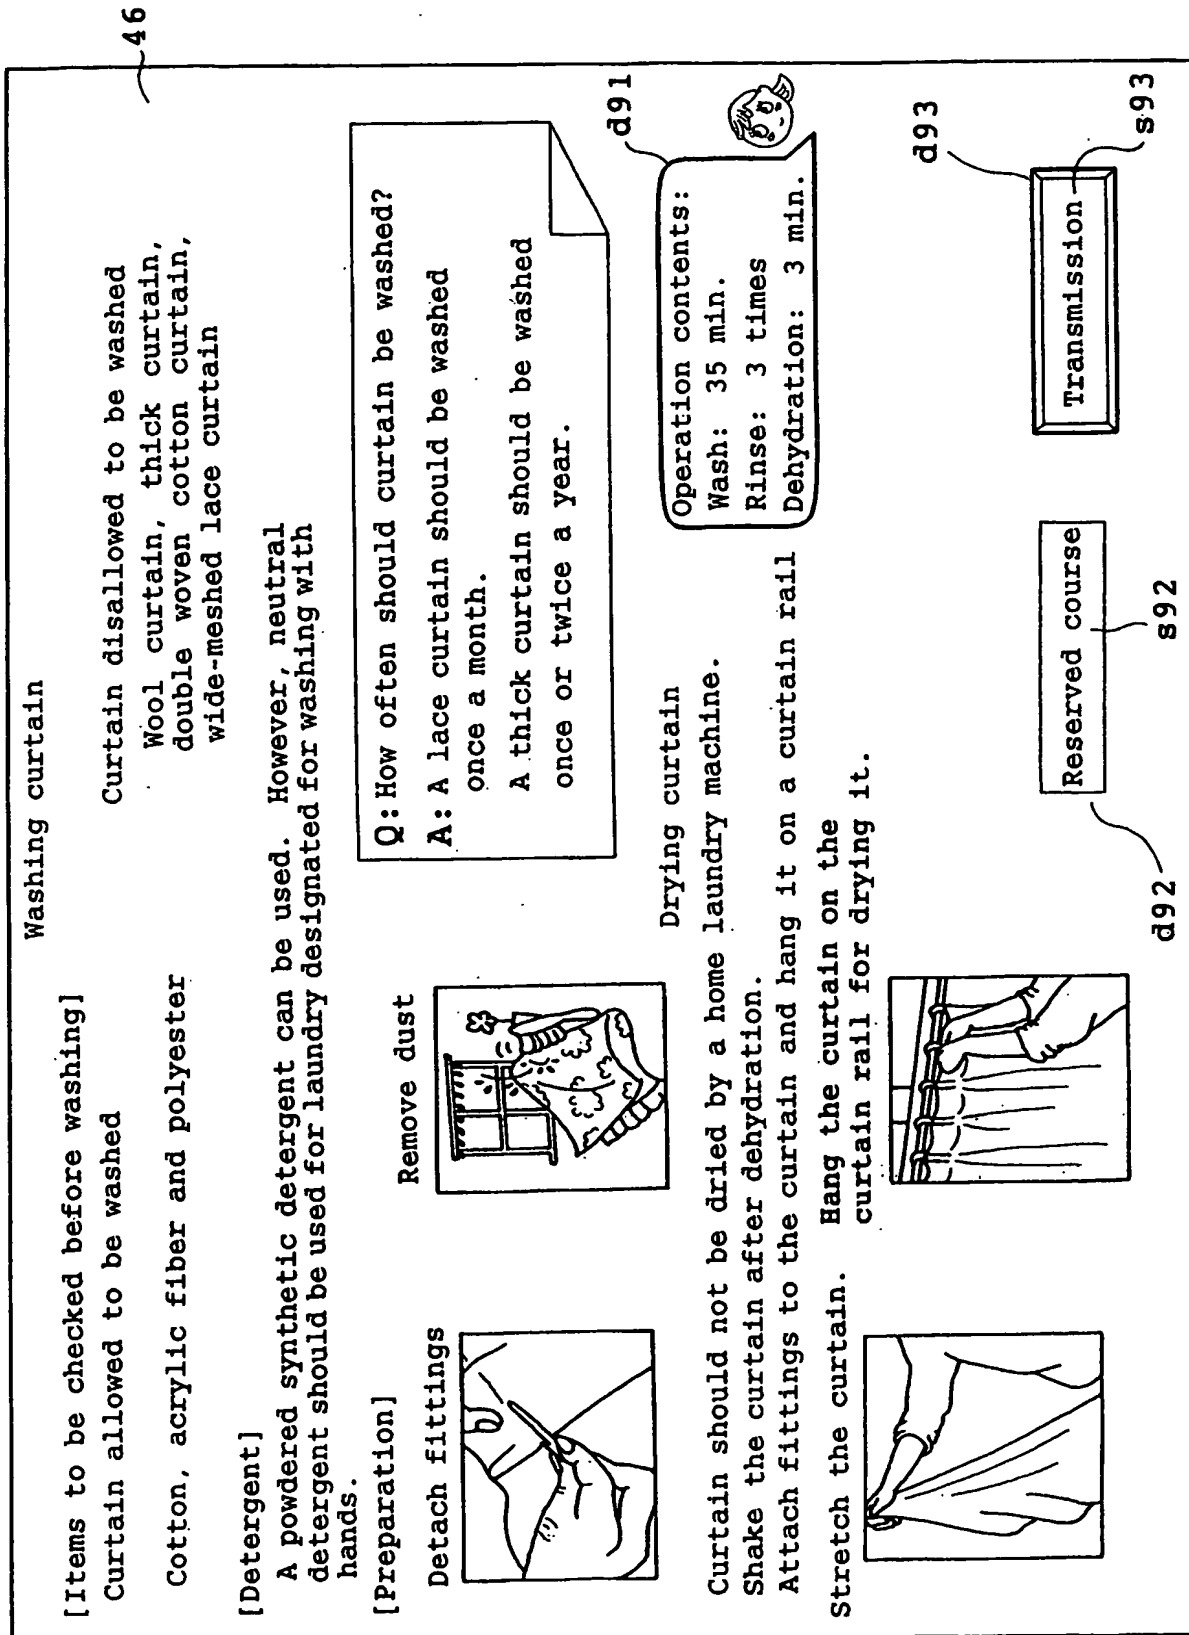


FIG. 9



10/29

## Bedding and bulk

Clothing			Water level	Wash		Rinse		Dehydration	
				Course	Time	Course	Time	Course	Time
Blanket	~2.2kg	1	40L	Setting blanket course (35 min., 3 times, 6 min. (preheating: 25 min.))					
	~3.0kg	1	40L						
Rugs and mats			40L	Setting blanket course (35 min., 3 times, 6 min.)					
Curtain	~2.0kg	3 lace curtains	40L	Setting blanket course (35 min., 3 times)		Blanket		Blanket	3 min.
Towelket			40L	Blanket	15 min.	Blanket	Twice	Blanket	6 min. (25)
Bed sheets, pillow cover and table cloth	~2.0kg	4	40L	Blanket	15 min.	Blanket	Twice	Blanket	3 min. (25)
	~4.5kg	9	40L	Blanket	15 min.	Blanket	Twice	Blanket	3 min.

FIG. 10A

## Bedding and bulk

Clothing			Drying		
			Course	Time	setting
Blanket	~2.2kg	1	Blanket	Automatic	-
	~3.0kg	1	-	-	-
Rugs and mats					
Curtain	~2.0kg	3 lace curtains			
Towelket			Standard	Automatic	-
Bed sheets, pillow cover and table cloth	~2.0kg	4	Standard	Automatic	Ironing
	~4.5kg	9	-	-	-

No additional drying

FIG. 10B

12/29

## Everyday wear

Clothing				Water level	Wash		Rinse		Dehydration	
					Course	Time	Course	Time	Course	Time
Bath towel	~ 2.1kg	Number: 7	Automatic	Course: standard, time: automatic						
	~ 4.2kg	Number: 14								
Shirt	~ 4.0kg	Automatic	Automatic	Course: standard, time: automatic						
	~ 7.0kg									
T-shirt, Trainer, Polo shirt	~ 4.0kg	Automatic	Automatic	Course: standard, time: automatic						
	~ 7.0kg									
Heavily soiled (training wear, working clothes, socks)	~ 4.0kg	Automatic	Automatic	Course: strong, time: automatic						
	~ 7.0kg									
Diaper	~ 4.0kg	Automatic	Automatic	Course: strong, time: automatic						
	~ 7.0kg									

FIG. 11A

## Everyday wear

Clothing				Drying		
				Course	Time	setting
Bath towel	~ 2.1kg	Number: 7		Standard	Automatic	Strong
	~ 4.2kg	Number: 14		-	-	-
Shirt	~ 4.0kg			Standard	Automatic	Ironing
	~ 7.0kg			-	-	-
T-shirt, Trainer, Polo shirt	~ 4.0kg			Standard	Automatic	Reducing shrinkage
	~ 7.0kg			-	-	-
Heavily soiled (training wear, working clothes, socks)	~ 4.0kg			Standard	Automatic	-
	~ 7.0kg			-	-	-
Diaper	~ 4.0kg			Standard	Automatic	Strong
	~ 7.0kg			-	-	-

No additional drying

FIG. 11B

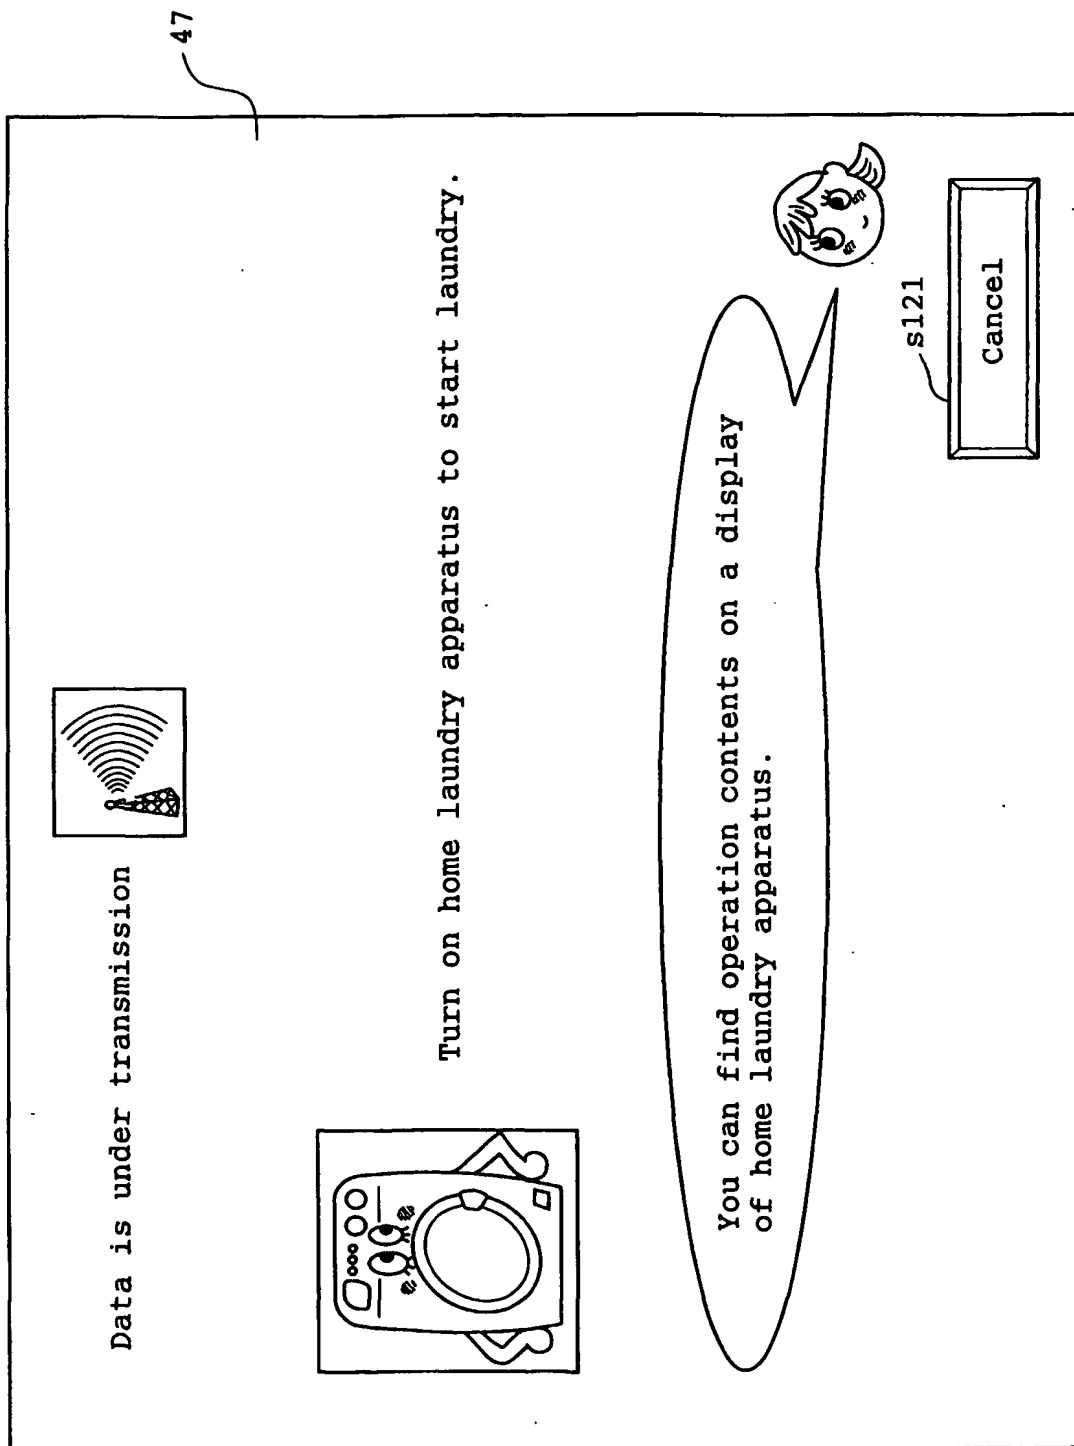


FIG. 12

To those who are allergic (atopic etc.)

#### ■ Why allergy occurs

Washing detergents contain a surface active agent to improve removal of stains etc. from laundry. This component remains in the laundry even after completion of washing when rinsing is insufficient or an excessive amount of detergent is supplied, causing inflammation.

#### ■ Way of preventing allergy

Reduce an amount of detergent when laundry is soiled light. In usual use, a degree of inflammation can be reduced by increasing the number of times of rinsing or an amount of water. Touch the lower switch of "Atopy care" when you desire an increase in the number of times of rinsing. When you use the service for transmission of operation contents suitable for laundry, the number of times of rinsing is automatically increased so that an amount of detergent remaining is reduced.

#### ■ Other links

These are links for detailed information about atopy. Please utilize them.

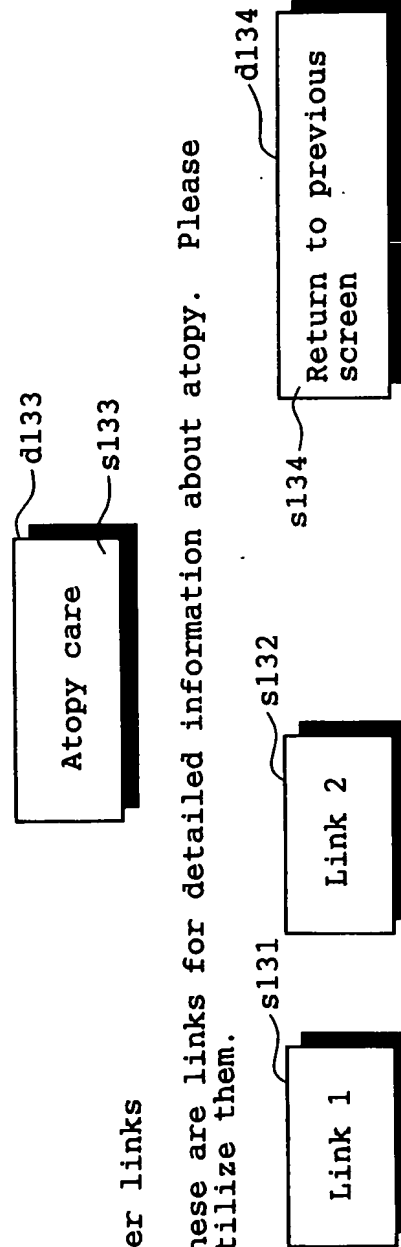
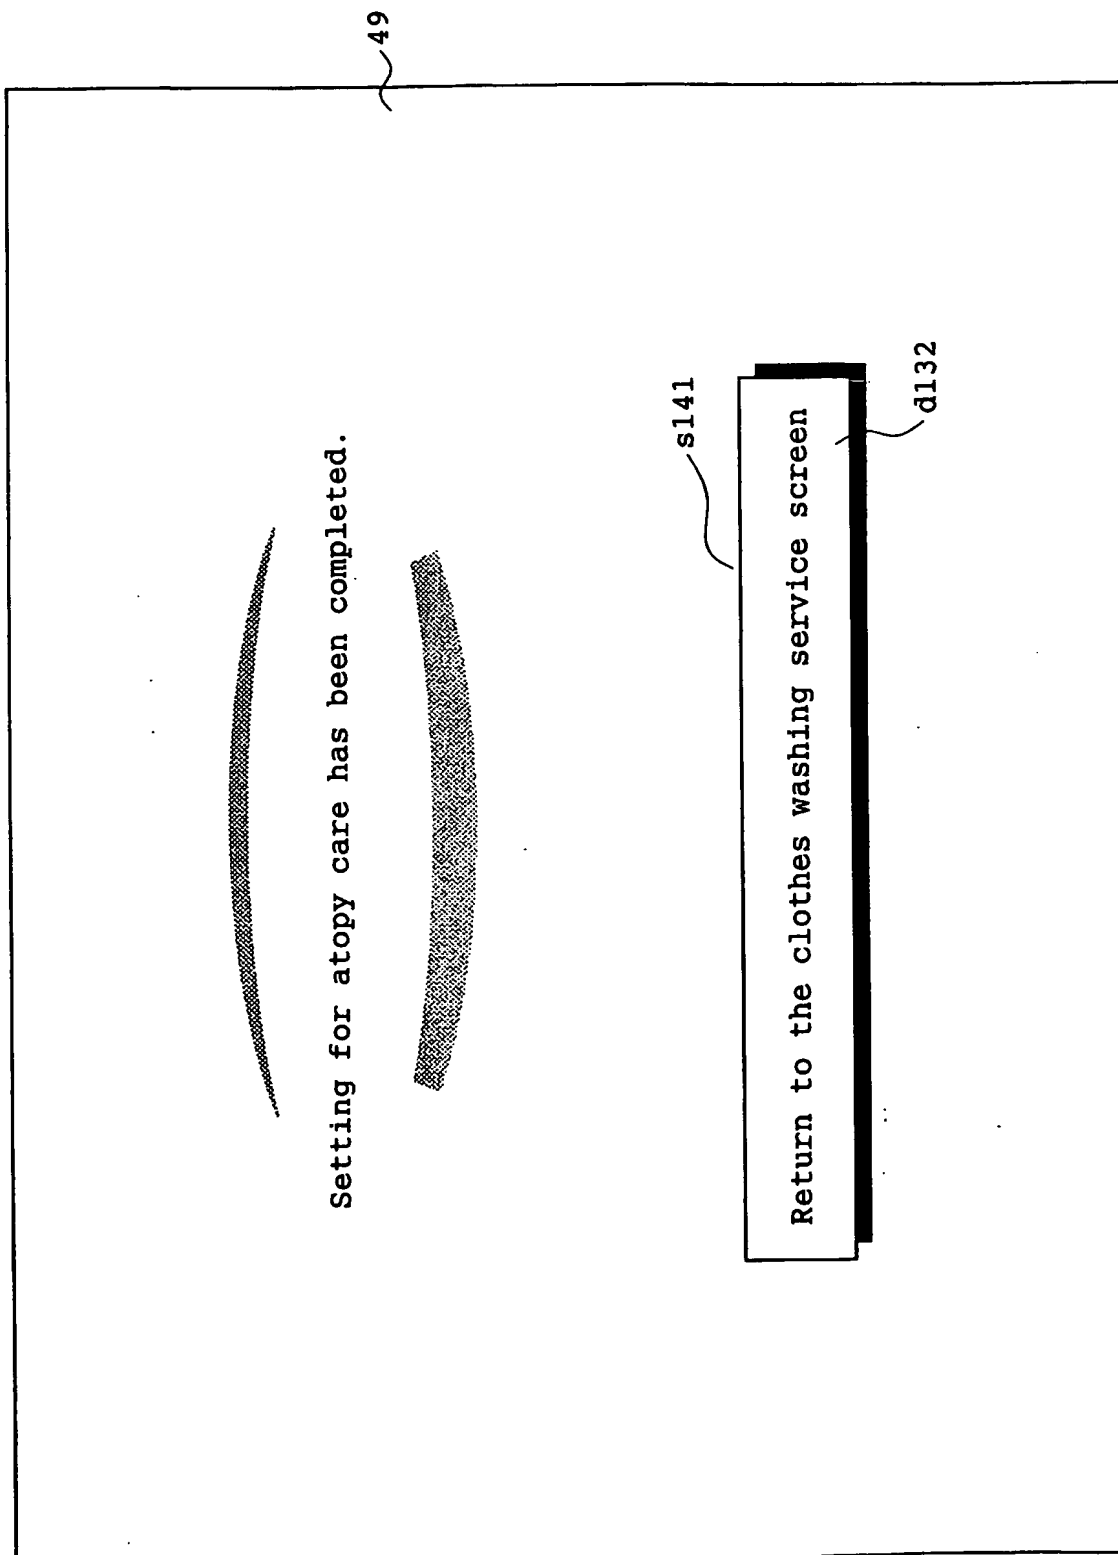


FIG.13



**FIG. 14**

## About used detergent


### ■ Types of detergents

There are various types of detergents according to soil. Washing detergents are roughly divided into powdered synthetic detergent, liquid synthetic detergent, powdered soap, liquid soap and liquid neutral detergent.

### ■ Washing detergent which can be used with home laundry apparatus

All the detergents except powdered soap can be used. However, use detergents which are less bubbly. When a detergent is bubbly, a degree of removal of soil and rinsing will sometimes become insufficient.

■ To those who desire a washing manner according to the used detergent, operation contents according to the used detergent will be transmitted when you use the service for transmission of operation contents according to the used detergent. Touch the indication of used detergent.

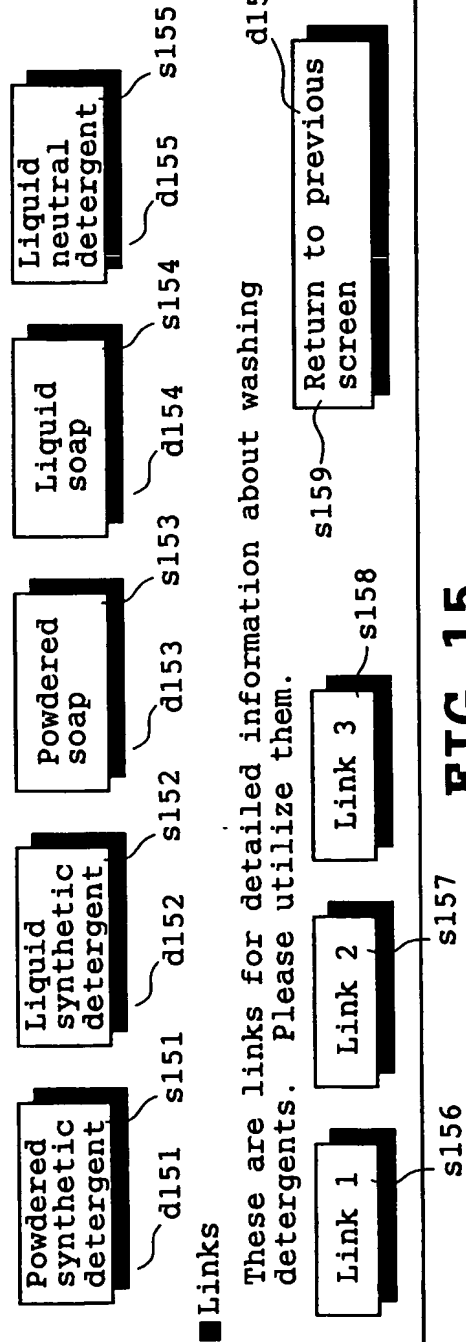

## FIG. 15



### In use of powdered synthetic detergent

#### ■ Notices of use

Detergent sometimes remains in the detergent case at a house to which a small amount of water is supplied. Further, comply with the indication on a container of detergent when the detergent is supplied. An amount of detergent displayed sometimes differs depending upon a selected course even when an amount of clothes is the same.

Amount of clothes	Displayed amount of detergent (by cup)
About 7 kg	0.9 cups
About 4 kg	0.6 cups
About 2 kg	0.5 cups
About 1 kg	0.3 cups

Touch here when you desire to set.

s161

Operation control is set for powdered synthetic detergent


d161

s162

Return to previous screen

d162

FIG. 16

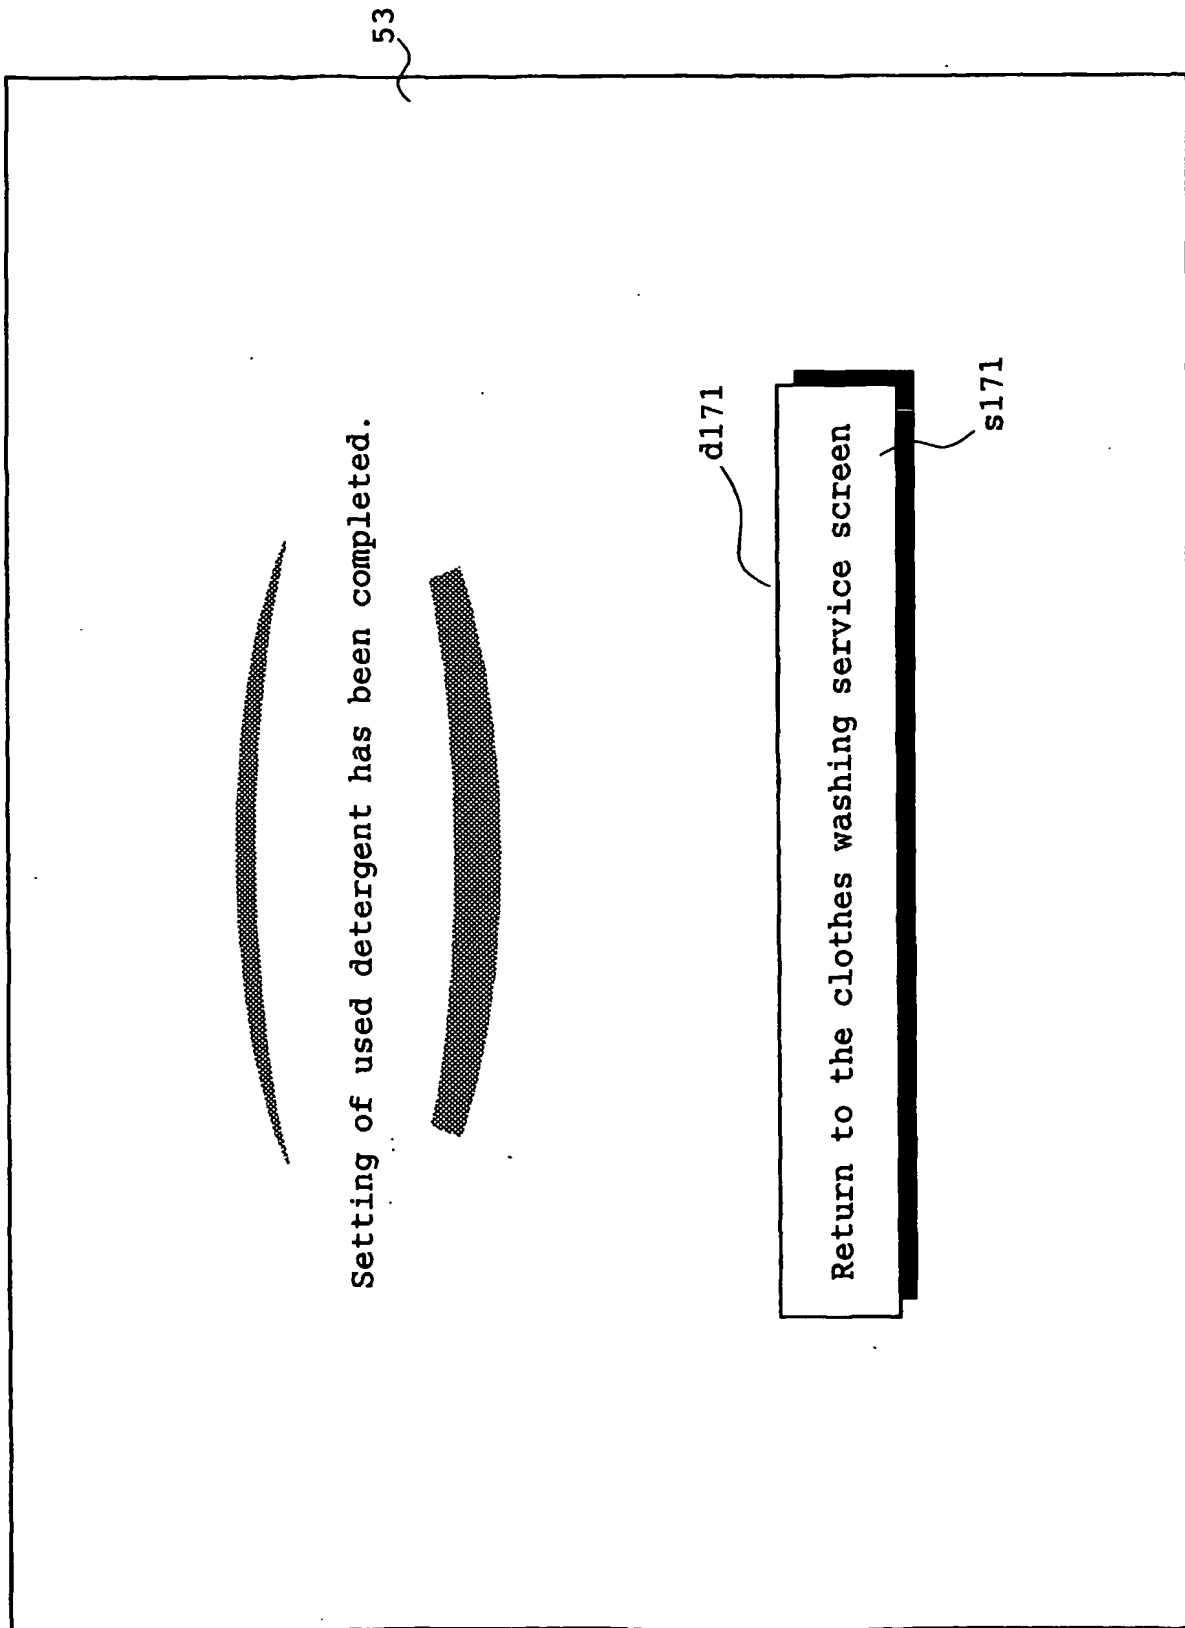**FIG. 17**

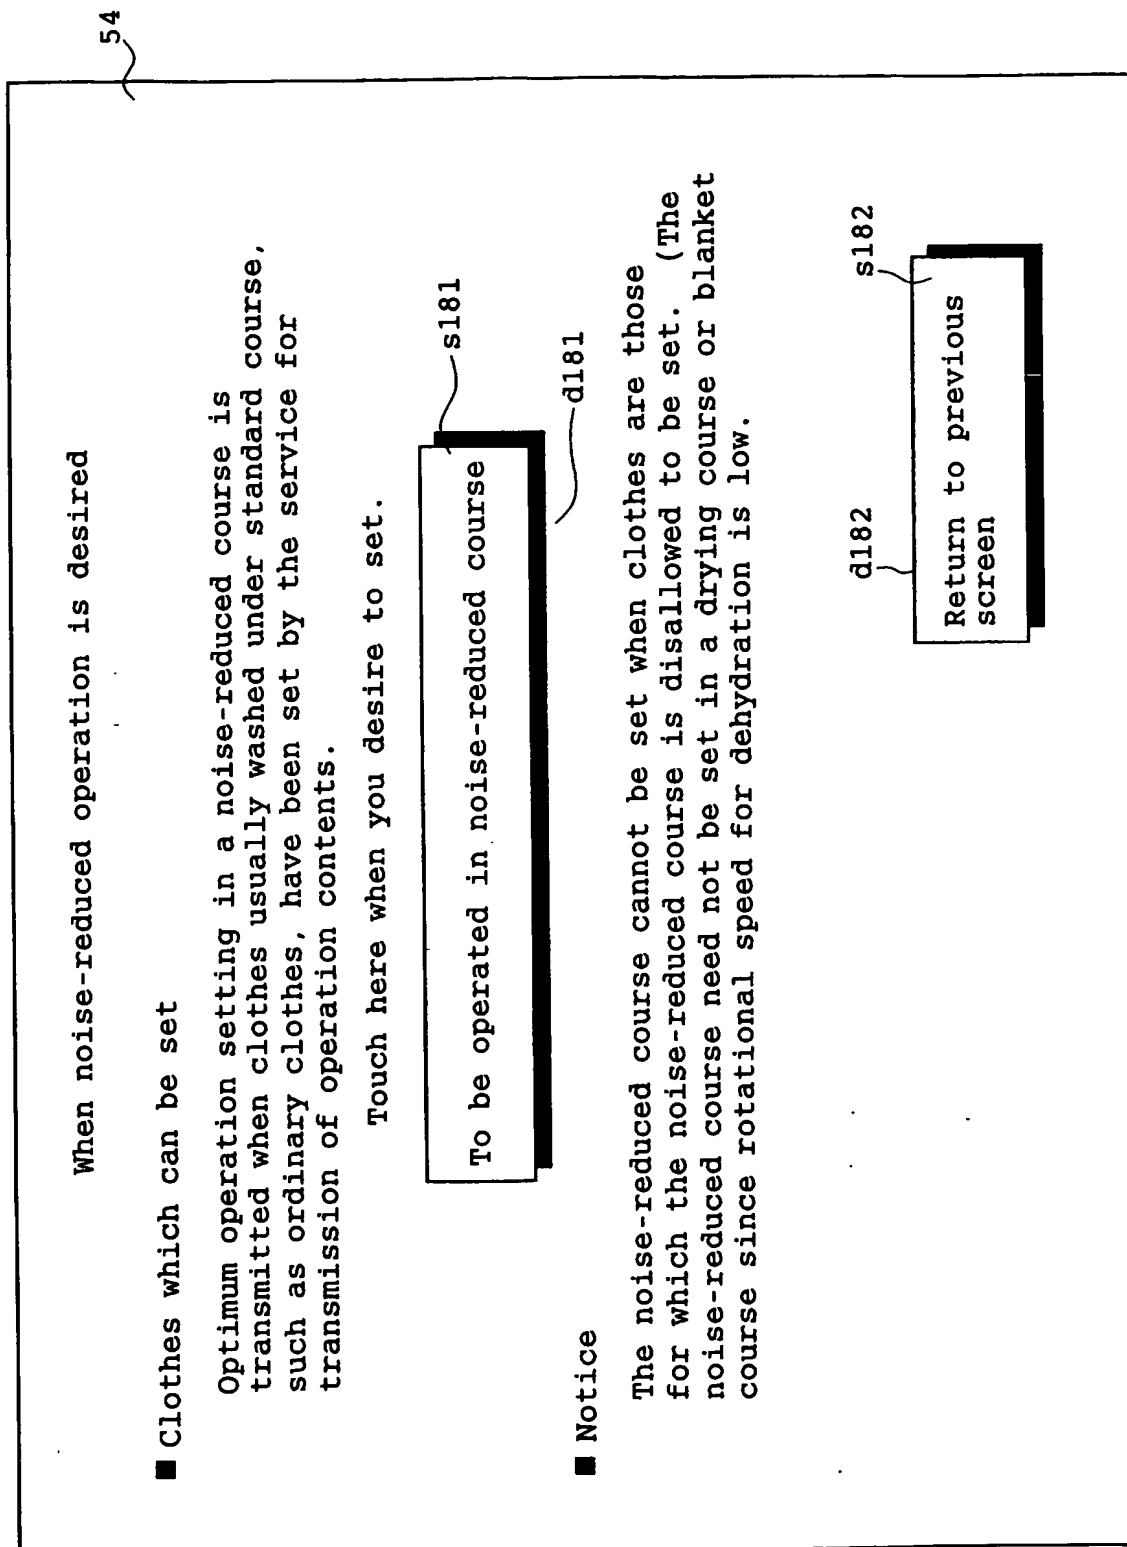


FIG. 18

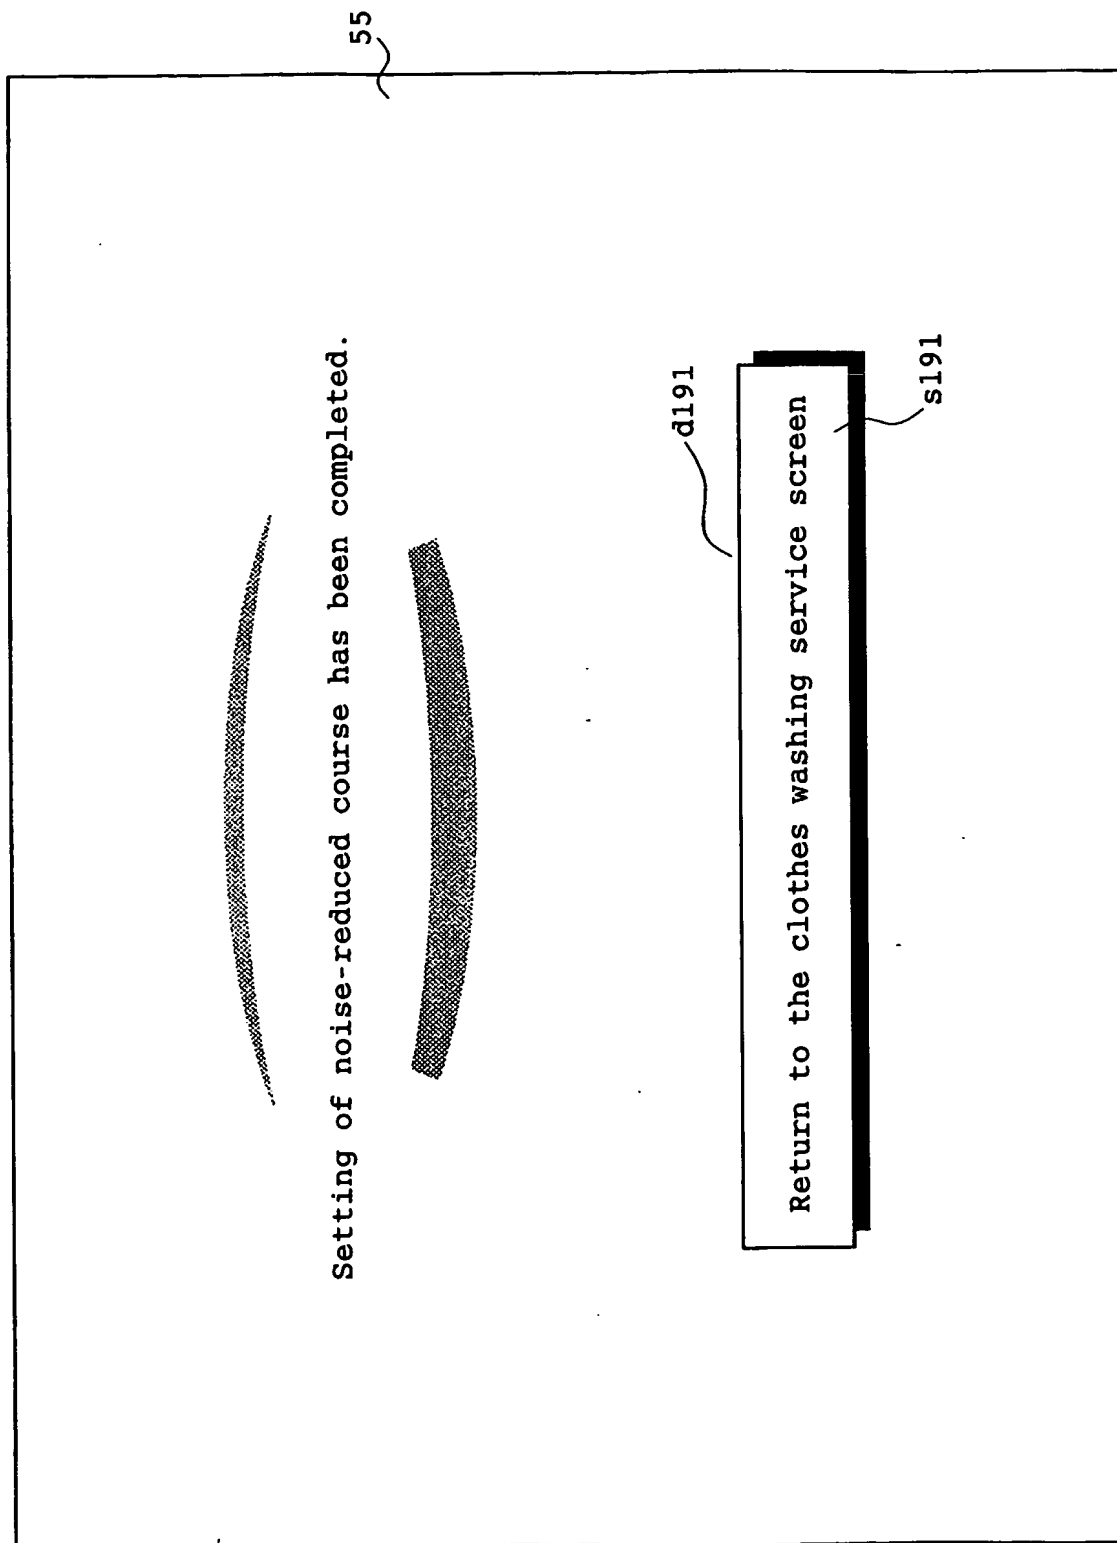


FIG. 19

22/29

56

Wash step is now under operation.

Operation contents can be en route changed.  
Do you desire change?

Yes

s202

Remaining time to completion of operation is

About 1:39

d201

Currently set contents:

Washing course	Standard
Contents of drying	Standard, automatic
Steps	Wash to drying
Bathwater	Wash step only
Hot water	Unset
Reservation	Unset

Additional clothes


d203

s203

FIG. 20

57

Operation contents are altered en route.

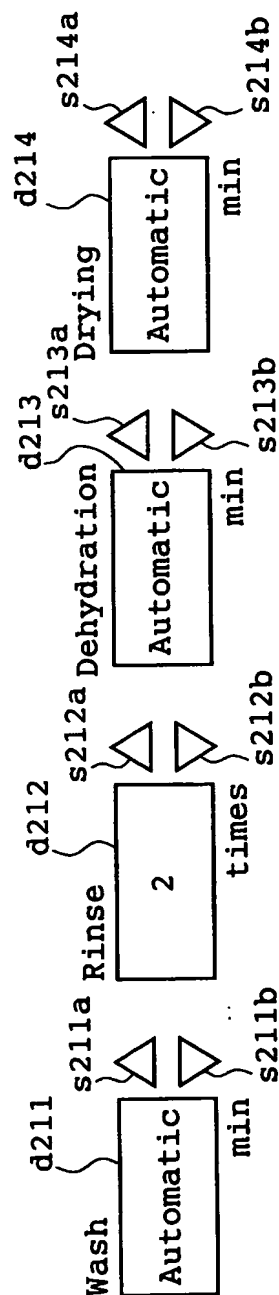

Alter set time and number of times with  $\Delta$  and  $\nabla$  located at one side of a step whose set contents are desired to be altered. Touch the lower switch of Transmission after completion of setting.

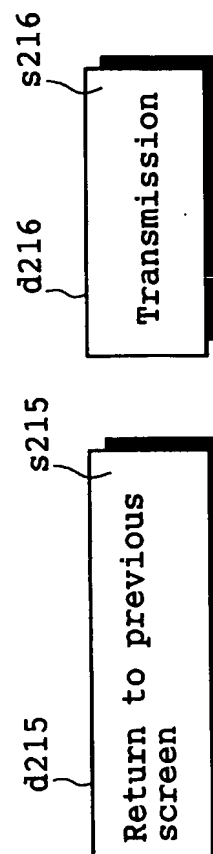


FIG. 21

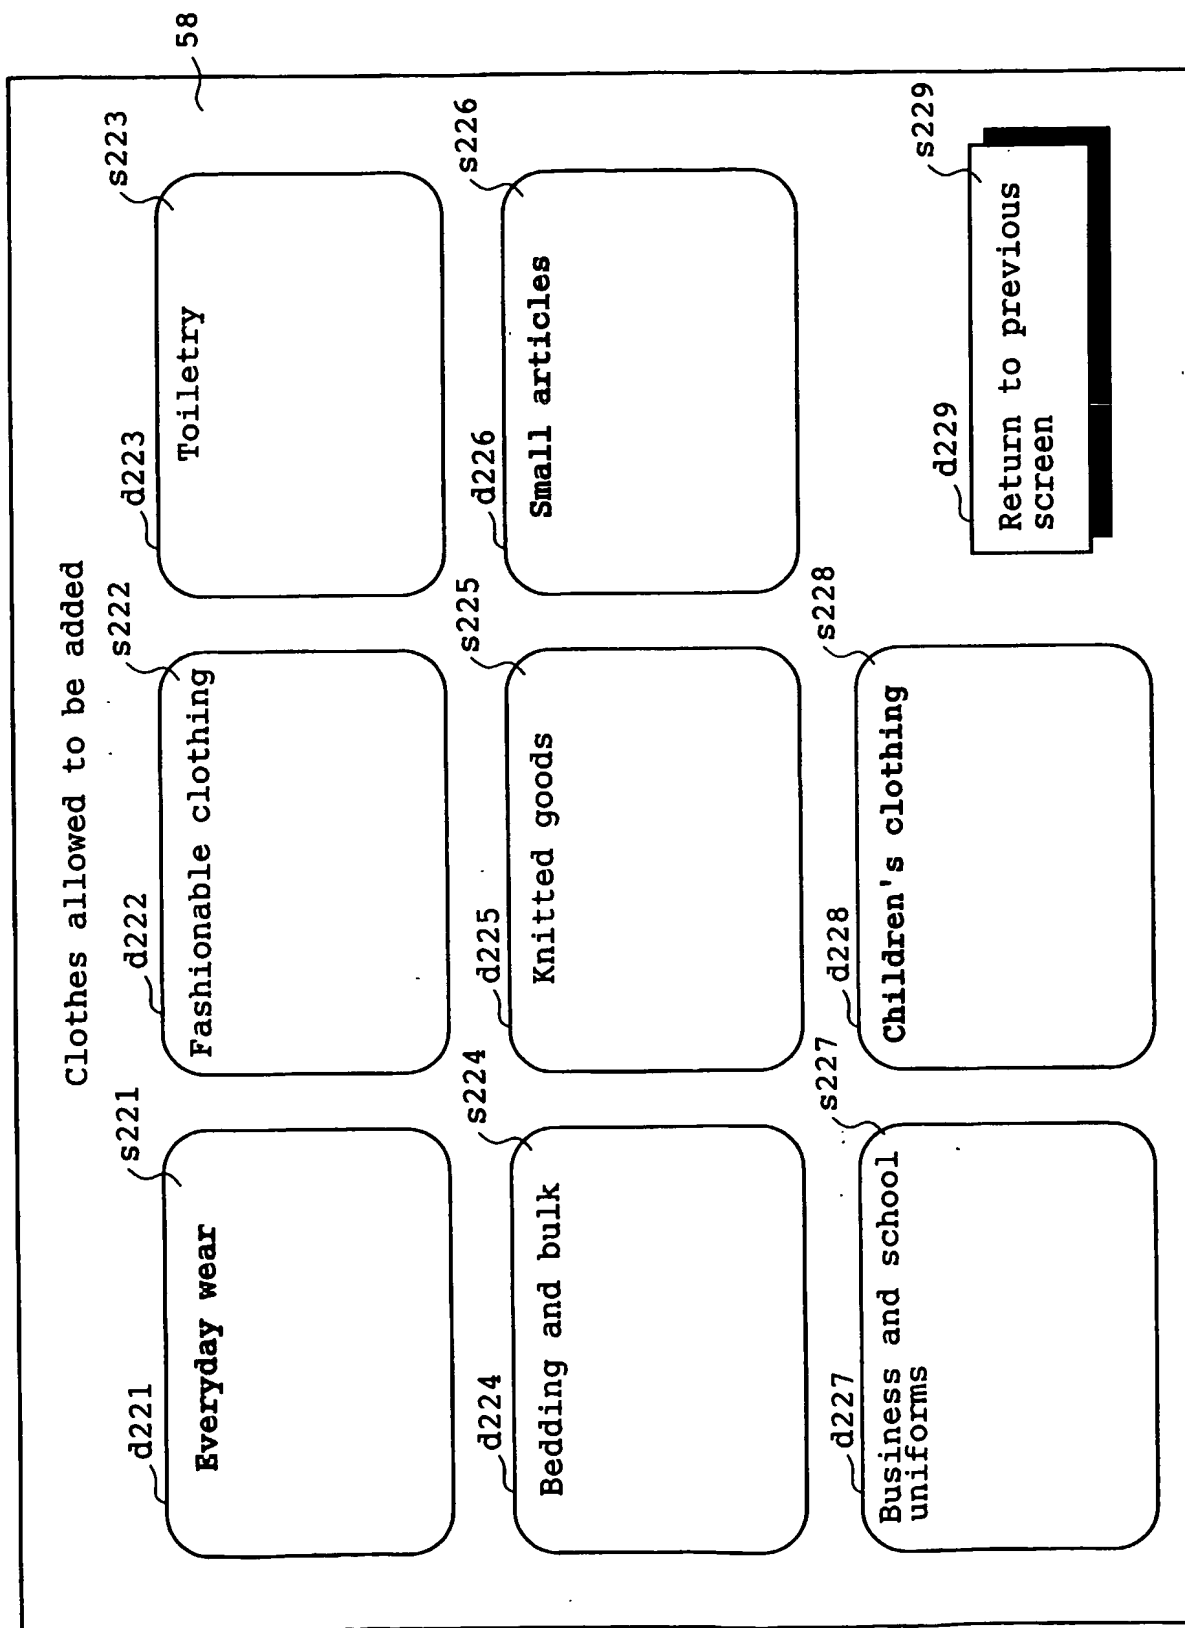


FIG. 22

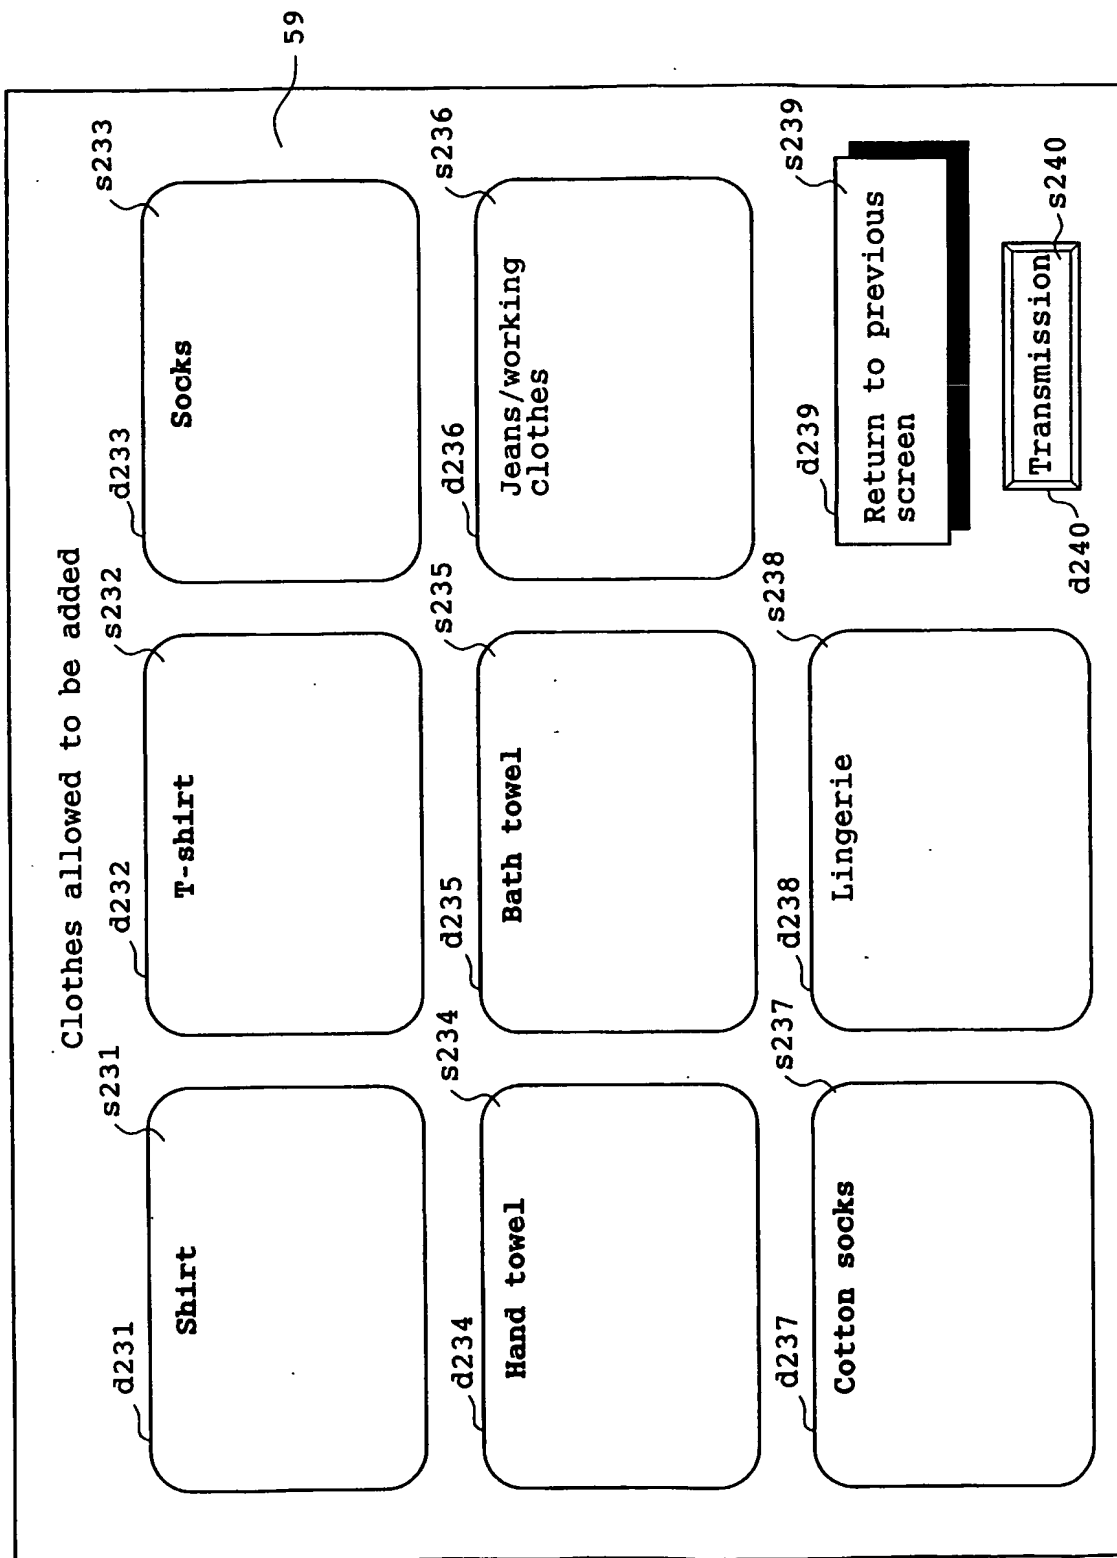


FIG. 23



26/29

60

Control is currently on standby for reservation.

Reserved time and operation contents can be altered.  
Do you desire change?

Yes

s241

Remaining time to completion of reserved operation is:

About AM 7:30

d241

Currently set contents:

Washing course	Standard
Contents of drying	Standard, automatic
Steps	Wash to drying
Bathwater	Wash step only
Hot water	Unset
Reservation	After 8 hours

**FIG. 24**

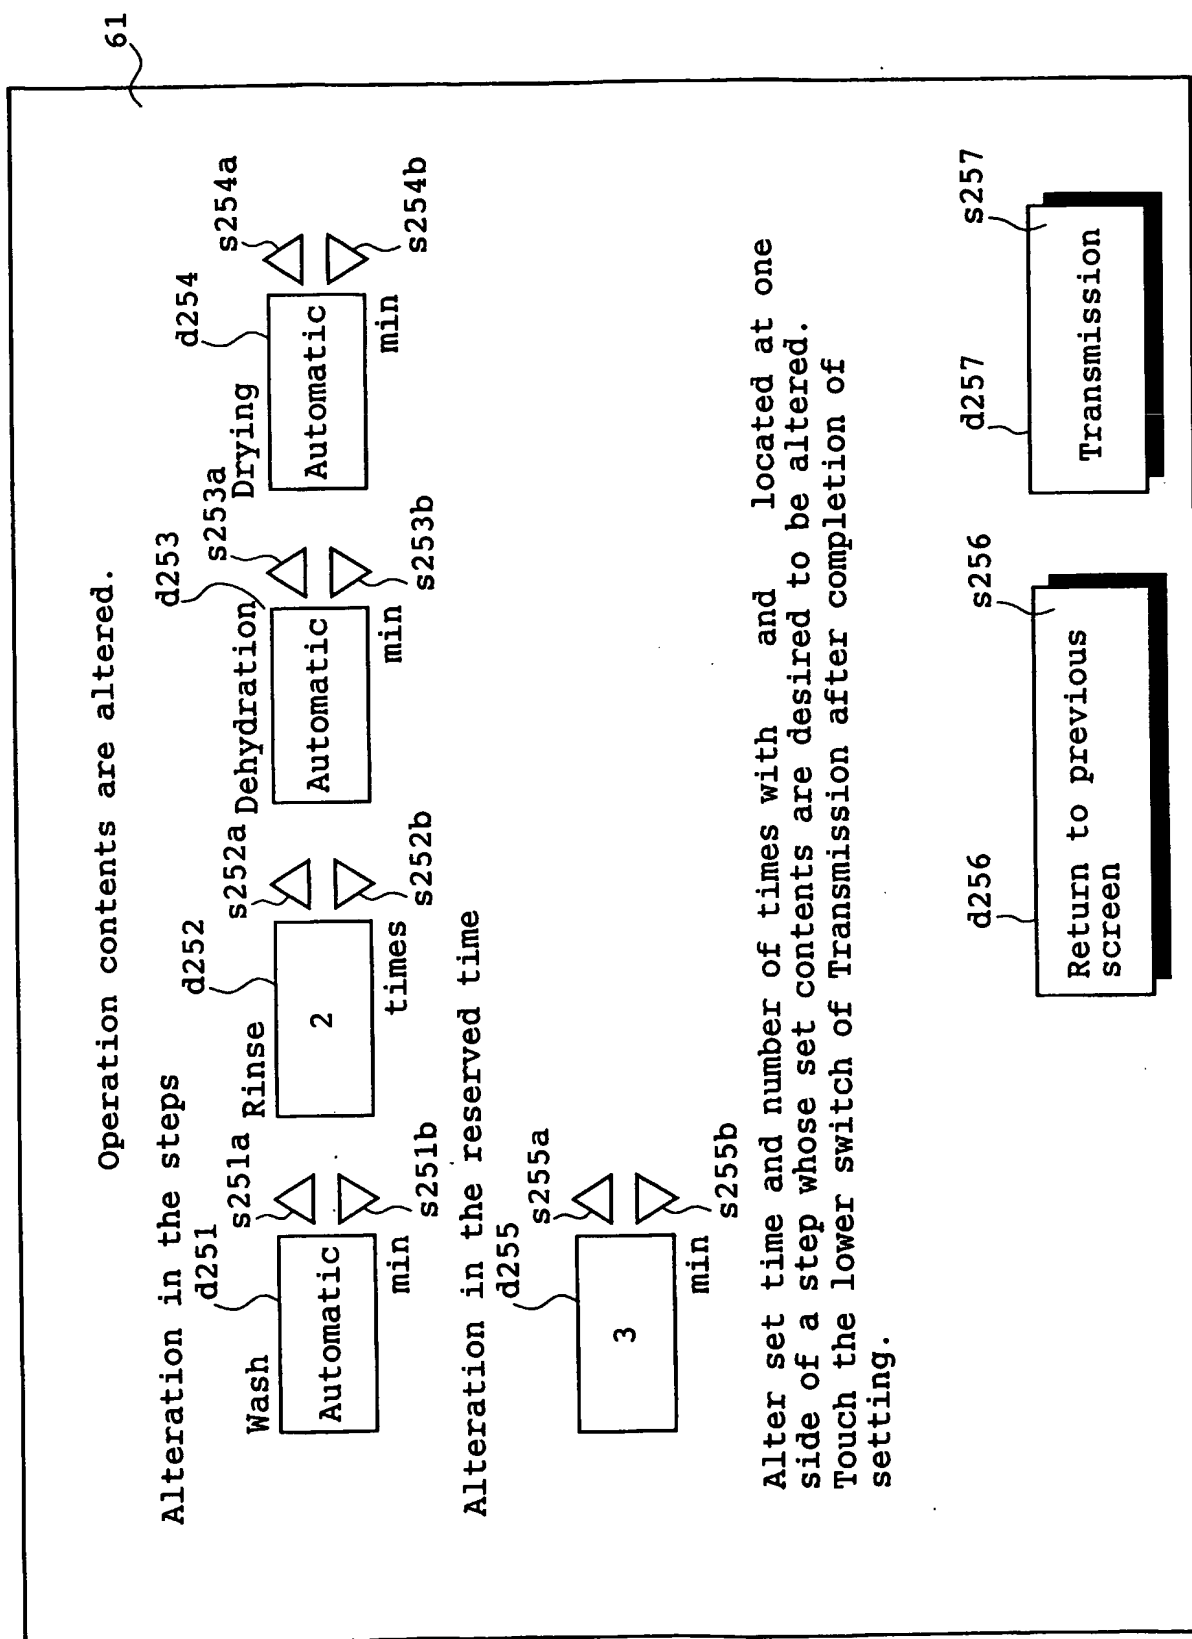
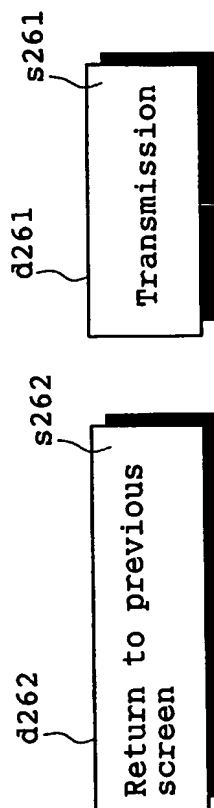


FIG. 25

Operation may not be completed by a finish time since the reserved time is short in the currently set contents. Do you agree to the currently set contents? Touch the transmission switch again when you agree to them. Operation will now start.

Return to the previous screen for re-setting when the contents should be altered.

Under the current set conditions, the shortest reserved finish time occurs after 6 hours.

**FIG. 26**

63

**Caution!**

Operation contents have been altered from the contents set by the clothes washing service at the home laundry apparatus side.

Wash time has been changed from 5 min to 8 min. Soft clothes tend to be easily damaged. Put the clothes easy to be damaged into a washing net or wash them separately.

**FIG. 27**

## INTERNATIONAL SEARCH REPORT

Inte Application No  
PCT/JP 02/13873A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 D06F39/00 D06F33/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 28068 A (AISA VALERIO ; WRAP S P A (IT)) 19 April 2001 (2001-04-19) the whole document	1-15
X	WO 01 96645 A (PROCTER & GAMBLE) 20 December 2001 (2001-12-20) the whole document	1-15
X	US 6 121 593 A (LANDRY KENNETH D ET AL) 19 September 2000 (2000-09-19) the whole document	1-15
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 24, 11 May 2001 (2001-05-11) -& JP 2001 195119 A (TOSHIBA KYARIA KK), 19 July 2001 (2001-07-19) abstract	1
	--- -/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

4 April 2003

Date of mailing of the international search report

11/04/2003

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Norman, P

## INTERNATIONAL SEARCH REPORT

Int Application No

PCT/JP 02/13873

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	EP 1 217 475 A (LG ELECTRONICS INC) 26 June 2002 (2002-06-26) abstract ---	1
P,X	EP 1 186 695 A (TOKYO SHIBAURA ELECTRIC CO) 13 March 2002 (2002-03-13) abstract ---	1
A	DE 199 05 533 A (BSH BOSCH SIEMENS HAUSGERAETE) 17 August 2000 (2000-08-17) the whole document ---	1-15
A	EP 1 135 553 A (BSH BOSCH SIEMENS HAUSGERAETE) 26 September 2001 (2001-09-26) the whole document ---	1-3,7,8, 10
A	WO 01 96644 A (CHO SO YOUNG ;JO SEONG JIN (KR); LG ELECTRONICS INC (KR)) 20 December 2001 (2001-12-20) the whole document -----	1-15

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Inte Application No  
PCT/JP 02/13873

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0128068	A	19-04-2001	IT T0990891 A1 AU 2123500 A EP 1222728 A1 WO 0128068 A1 TR 200201010 T2	13-04-2001 23-04-2001 17-07-2002 19-04-2001 21-08-2002
WO 0196645	A	20-12-2001	AU 6835001 A EP 1290260 A2 WO 0196645 A2 US 2001049846 A1	24-12-2001 12-03-2003 20-12-2001 13-12-2001
US 6121593	A	19-09-2000	WO 0201920 A1 AU 6200900 A EP 1224842 A1	03-01-2002 08-01-2002 24-07-2002
JP 2001195119	A	19-07-2001	NONE	
EP 1217475	A	26-06-2002	CN 1359214 A EP 1217475 A2 JP 2002218566 A US 2002073183 A1	17-07-2002 26-06-2002 02-08-2002 13-06-2002
EP 1186695	A	13-03-2002	JP 2002085887 A JP 2002085888 A CN 1343808 A EP 1186695 A2 US 2002032491 A1 CN 1343807 A	26-03-2002 26-03-2002 10-04-2002 13-03-2002 14-03-2002 10-04-2002
DE 19905533	A	17-08-2000	DE 19905533 A1 WO 0047808 A1 EP 1153164 A1 TR 200101925 T2	17-08-2000 17-08-2000 14-11-2001 21-01-2002
EP 1135553	A	26-09-2001	DE 19855503 A1 WO 0032865 A1 EP 1135553 A1 TR 200101396 T2 US 2001042391 A1	08-06-2000 08-06-2000 26-09-2001 21-01-2002 22-11-2001
WO 0196644	A	20-12-2001	AU 6436501 A EP 1294973 A1 WO 0196644 A1	24-12-2001 26-03-2003 20-12-2001

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**